

15-065-02448-00-00


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Graham County. Sec. 28 Twp. 9S Rge. 21W~~(E)~~~~(W)~~  
Location as "NE/CNW%SW%" or footage from lines NW SW SW  
Lease Owner El Dorado Refining Co. - K & E Drilling, Inc.  
Lease Name Dodson Well No. #4  
Office Address 1006 Central Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) dry hole  
Date well completed June 6, 19 56  
Application for plugging filed June 6, 19 56  
Application for plugging approved June 6, 19 56  
Plugging commenced June 6, 1956 19  
Plugging completed June 6, 1956 19  
Reason for abandonment of well or producing formation commercial quantities of  
oil not found  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? yes

NORTH

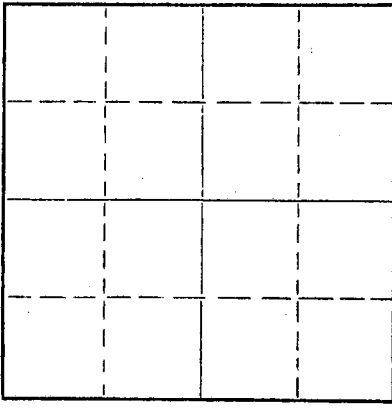

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well MAX Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3950 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			m	8 5/8	249'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud from 3950' to 240'  
Set wooden plug with 15 sacks cement.  
Second plug at 40' and capped with 10 sacks cement

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor K & E DRILLING, INC.  
Address 1006 Central Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Dale Silcott (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale Silcott  
1006 Central Bldg., Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of June, 19 56  
My commission expires June 25, 1956  
James Miller  
Notary Public.

STATE CORPORATION COMMISSION

PLUGGING  
FILE SEC. 28 T. 9 R. 21W  
BOOK PAGE 70 E. 9

CONSERVATION DIVISION  
Wichita, Kansas  
6-12-56

15-065-02448-00-00

EL DORADO REFINING CO. - K & E DRILLING, INC.  
Dodson #4

NW SW SW 28-9S-21W  
Graham County, Kansas

Comm: 5-29-56  
Comp: 6-6-56  
Total Depth: 3950'

Casing  
8 5/8" Set @ 249'

Cement  
150 sacks

<u>FORMATION</u>	<u>DEPTH</u>
Clay & sand	8 - 120
Shale	120 - 249
Shale - shells	249 - 1200
Sand & shale	1200 - 1550
Red Bed & Shale	1550 - 1805
Anhydrite	1805 - 1845
Shale & shells	1845 - 2215
Lime & shale	2215 - 3604
Lime	3604 - 3652
Lime	3652 - 3770
Lime & shale	3770 - 3845
Shale	3845 - 3885
Lime & shale	3885 - 3950

STATE OF KANSAS )  
                          ) SS  
SEDGWICK COUNTY )

I hereby certify that the above information is true and correct to the best of my knowledge.

*Dale Silcott*

Subscribed and sworn to before me this 11th day of June, 1956.

*Franco Mark*  
Notary Public

Commission expires: June 25, 1956

PLUGGING  
FILE SEC. 28 T. 9 R. 21W  
BOOK PAGE 70 LINE 9

6-12-56