


15-065-00381-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

NORTH

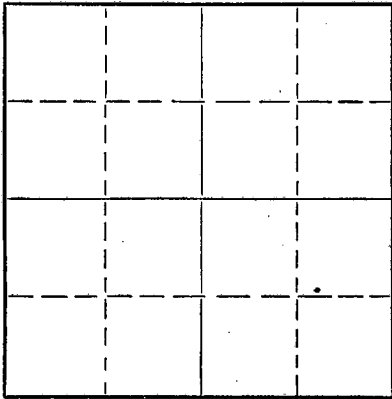

Locate well correctly on above
Section Plat

Graham County, Sec. 36 Twp. 9 Rge. 21 (E) W (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW NW NE
Lease Owner Bennett & Roberts Drilling Co.
Lease Name Renner, B. Well No. 1
Office Address Russell, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 9/9 19 53
Application for plugging filed 9/9 verbally 19 53
Application for plugging approved 9/9 verbally 19 53
Plugging commenced 9/9 19 53
Plugging completed 9/9 19 53
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3969 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	186'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud, pushed bottom plug to 180'. Put $\frac{1}{2}$ sack hulls and 15 sacks of cement through drill pipe. Filled hole with heavy mud to within 40' of top. Top plug @ 40'. Dumped 10 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Address 9-15-53

STATE OF KANSAS, COUNTY OF RUSSELL, ss: C. L. Roberts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Roberts

Russell (Address)

SUBSCRIBED AND SWORN TO before me this 14th day of September, 1953

My commission expires 6/17/54

Notary Public

PLUGGING
FILE SEC 36 T 9 R 21W
BOOK PAGE 127 LINE 43

15-065-00381-00-00

Bennett & Roberts Drilling Co.
Renner#1

NW NW NE Sec. 36-9-21
Graham Co., Kansas

Comm: 8/28/53
Comp: 9/9/53

R.T.D. 3969

Casing 8 5/8" Set @ 186'	Cement 125 sx
Formation:	Depth:
Surface clay	30'
Sand	45
Sandy Shale	186
Shale & Shells	800
Sand	840
Gray Shale	1175
Shale & Shells	1290
Shells, Sand & Shale	1580
Shale	1780
Red Shale	1790
Shale	1835
Anhydrite	1865
Shale & Lime streaks	2180
Shale & Lime	3475
Lime	3570
Shale & Lime	3615
Lime	3931
Cong. & Chert	3969

STATE OF KANSAS)
COUNTY OF RUSSELL) SS


I hereby certify that the above information is true
and correct to the best of my knowledge.

Irvin Lake

Subscribed and sworn to before me this 14th day of Sept,
1953.

Clara Hummel

My commission expires 6/17/54



STATE OF KANSAS

9-15-53

PLUGGING
FILE SEC 36 T 9 R 21W
BOOK PAGE 127 LINE 43