


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

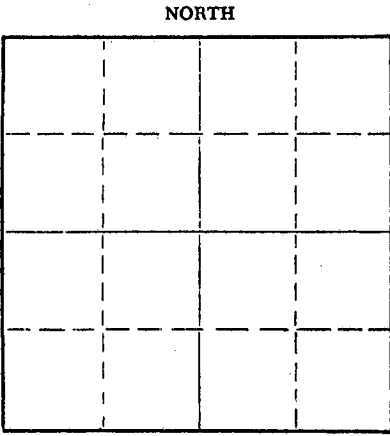

Locate well correctly on above Section Plat

Graham County, Sec. 36 Twp. 9 Rge. (E) 21 (W)
Location as "NE/CNW%SW%" or footage from lines CN/2 N/2 SW
Lease Owner Allison & Black
Lease Name Lambert Well No. 3
Office Address 1415 Wichita Plaza - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry
Date well completed 9-19 19 67
Application for plugging filed 9-19 19 67
Application for plugging approved 9-19 19 67
Plugging commenced 12:30 9-19 19 67
Plugging completed 11:30 P.M. 9-19- 19 67
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production none 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bill Nicholas - Morland, Kansas
Producing formation Depth to top Bottom Total Depth of Well 3906 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Shale & Soil	-	0	208	8 5/8"	208"	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug hole - ran drill pipe to 1180' and cemented with 100 sacks
drill pipe to 240' and cemented with 25 sacks and 10 sacks at
40' hole plugged with pump truck - 2 sacks in rat hole

RECEIVED
STATE CORPORATION COMMISSION
SEP 26 1967

9-26-67
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor B & B DRILLING, INC.
Address 548 Petroleum Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss. Bill Lahar

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Lahar


548 Petroleum Building - Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of September, 1967

Alma A. Neeser

Notary Public.

My commission expires May 31, 1970



15-065-20088-00-00

36-9-21W

DATE 7/12/67

COMPANY ALLISON BLACK		WELL NO. 3	LEASE LAMBERT	RIG NO. 1
SECTION	TWP. OR BLOCK	RNG. OR SURVEY	COUNTY GRAHAM	STATE KANSAS

TOUR	FROM	TO	FORMATION	EMPLOYEE	OCCU-PATION	HOURS		RATE
						REG.	O.T.	
1	27			Robert Hochstadt	DRLR	9		
				Edward C. ...	DKM	8		
M.				Albion ...	HLP	8		
M.								
HRS. RUN	HRS. LOST	REASON						
DEFLECTION		BITS RUN	HOURS RUN					
CORE NOS.		SET NO.	CORE HEAD NO.	CORE NO. & DESCRIPTION				

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 15 1967

REMARKS:— *Dry celler helped rig up.*

CONSERVATION DIVISION OF
 WICHITA, KANSAS

TOUR	FROM	TO	FORMATION	EMPLOYEE	OCCU-PATION	HOURS		RATE
						REG.	O.T.	
2	0	127		John ...	DRLR			
				L.H. ...	DKM	8		
M.				Tom ...	HLP	8		
M.								
HRS. RUN	HRS. LOST	REASON						
1 1/2	1/2	REMARKS						
DEFLECTION		BITS RUN	HOURS RUN					
		127	1 1/2					
CORE NOS.		SET NO.	CORE HEAD NO.	CORE NO. & DESCRIPTION				
RR		1		114 1/2 D. ...				

REMARKS:— *DRIVE TO THE UP - DUG THAT HOLE START 127 HOURS 2:45 PM*

TOUR	FROM	TO	FORMATION	EMPLOYEE	OCCU-PATION	HOURS		RATE
						REG.	O.T.	
3	27	212	SANDSTONE	C. R. LAMAR	DRLR	16		
				E. D. ...	DKM	8		
M.				Ray ...	HLP	8		
M.								
HRS. RUN	HRS. LOST	REASON						
		REMARKS						
DEFLECTION		BITS RUN	HOURS RUN					
		OSC 36	2 1/2					
CORE NOS.		SET NO.	CORE HEAD NO.	CORE NO. & DESCRIPTION				
RR		1						

REMARKS:— *CHANGE BIT-FITTER IN 1207, RR RAN 5 FEET. REPAIRS 201 TO 207 W/ ...*

APPROVED BY FIELD SUPERINTENDENT

B & B DRILLING, INC.

548 Petroleum Building

Wichita, Kansas 67202

September 25, 1967

15-065-20088-00-00

DRILLERS LOG

Re: #3 Lambert
CN/2 N/2 SW
Section 36-9S-21E
Graham County, Kansas

COMPANY: Allison & Balck
CONTRACTOR: B & B Drilling, Inc.
TOTAL DEPTH: 3906'
COMMENCED: September 13, 1967
COMPLETED: September 19, 1967

RECEIVED
STATE CORPORATION COMMISSION

SEP 26 1967

9-26-67

CONSERVATION DIVISION
Wichita, Kansas

0	208	Shale & Sand	
208	765	Shale & Sand	
765	1115	Shale	
1115	1180	Sand	
1180	1270	Shale	
1270	1508	Sand	
1508	1677	Shale	
1677	1771	Shale	
1771	1811	Anhydrite	
1811	1965	Shale & Lime	
1965	2409	Shale & Lime	
2409	2590	Shale & Lime	Heebner 3520'
2590	2805	Shale & Lime	Toronto 3542'
2805	2935	Lime & Shale	Lansing 3560'
2935	3160	Shale & Lime	B/ Kansas City 3780'
3160	3410	Shale & Lime	Cong. 3853'
3410	3600	Lime & Shale	Arbuckle 3898'
3600	3655	Lime & Shale	
3655	3741	Lime	
3741	3770	Lime DST # 1	
3770	3793	Lime	
3793	3842	Lime	
3842	3890	Lime & Shale	
3890	3906	TD D & A	

We certify the above and foregoing to be true and correct copy of the log on the #3 Lambert, located in Graham County, Kansas

Bill Dahn President

Alma A. Neiser Notary Public

Subscribed and sworn to before me this 25th day of September, 1967

My commission expires
May 31, 1970

