

15-179-00049-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

Sheridan County. Sec. 11 Twp. 8 Rge. 26 (E) (W)

Location as "NE/CNW/SW" or footage from lines SW SW NW

Lease Owner Anschutz Drilling Company, Inc.

Lease Name F. Andregg Well No. 1

Office Address 709 Union Nat'l Bk Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 6-25-52

Application for plugging filed 6-25-52

Application for plugging approved 6-25-52


Plugging commenced 6-25-52

Plugging completed 6-25-52

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

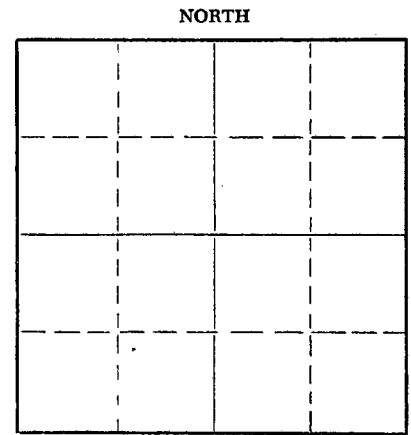

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 4364 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	228'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Top plug set at 40' with 10 sacks cement  
Bottom plug set at 200' with 15 sacks cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Anschutz Drilling Company, Inc.  
Address 709 Union Nat'l Bk Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Leon L. Mehler (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leon L. Mehler  
709 Union Nat'l Bk Bldg., Wichita, Ks.  
(Address)

SUBSCRIBED AND SWORN to before me this 3rd day of July, 1952

My commission expires May 26, 1952

Jacqueline L. ... Notary Public.



PLUGGING  
FILE SEC 11 T 8 R 26  
BOOK PAGE 26 LINE 44

JUL - 3 1952  
CONSERVATION DIVISION  
Wichita, Kansas

78-52

15-179-00049-0000

DRILLER'S LOG

Anschutz Drilling Company, Inc.  
#1 F. Andregg  
SW SW NW - 11-8S-26W  
Sheridan County, Kansas

<u>FROM</u>	<u>TO</u>	
0	90	Clay and sand
90	232	Sand and shale
232	1075	Shale
1075	1420	Shale and sand
1420	1655	Sand, shale and shells
1655	1800	Shale & sand
1800	1950	Sand
1950	1995	Red bed
1995	2170	Red bed, shale & shells
2170	2210	Anhydrite
2210	2525	Shale & shells
2525	2940	Shale & lime
2940	3080	Shale
3080	3470	Shale & lime
3470	3540	Lime & sand
3540	3735	Lime & shale
3735	3969	Lime
3969	4065	Lime & shale
4065	4105	Lime, shale & chert
4105	4228	Lime & shale
4228	4263	Lime, shale & chert
4263	4277	Lime & shale
4277	4315	Mississippi
4315	4364	Lime & chert
	4364	TOTAL DEPTH
		D&A

COMMENCED: 6-10-52  
COMPLETED: 6-25-52

CASING RECORD

Set 8-5/8" surface casing at  
228 feet with 150 sacks  
cement.

ELEVATION: 2530 RB

TOPS

- Anhydrite 2170
- Topeka Limestone 3514 (-984)
- Queen Hill Shale 3595
- Heebner Shale 3706
- Brown Limestone 3729
- Lansing-Kansas City 3748
- Base Kansas City 3966
- First Marmaton Limestone 3989
- Marmaton Chert 4069
- Mississippi Chert 4275
- Mississippi Limestone 4333

STATE OF KANSAS


COUNTY OF SEDGWICK

I hereby affirm that the foregoing is a true and correct copy of the log of Anschutz Drilling Company, Inc., #1 F. Andregg, located SW SW NW of Section 11-8S-26W, Sheridan County, Kansas.

ANSCHUTZ DRILLING COMPANY, INC.

BY: *Leon L. Mehler*  
Leon L. Mehler

Subscribed and sworn to before me this 3rd day of July, 1952.



*Jacqueline Kinnon*  
Notary Public

MY commission expires: May 2, 1956.

STATE OF KANSAS  
JUL 5 1952  
7-8-52  
CONSERVATION DIVISION  
Wichita, Kansas

**PLUGGING**  
FILE SEC 11 T 8 R 26W  
BOOK PAGE 26 LINE 44