

15-179-20280-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Sheridan County, Sec. 18 Twp. 8 Rge. 26 (E) W (W)

Location as "NE/CNWxSWx" or footage from lines SW NW SE
Lease Owner Kaiser-Francis
Lease Name Karnes Well No. 2
Office Address 4128 East 51st, Tulsa, Oklahoma 74135
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5-7 1971
Application for plugging filed 5-7 1971
Application for plugging approved 5-7 1971
Plugging commenced 5-7 1971
Plugging completed 5-7 1971
Reason for abandonment of well or producing formation' Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

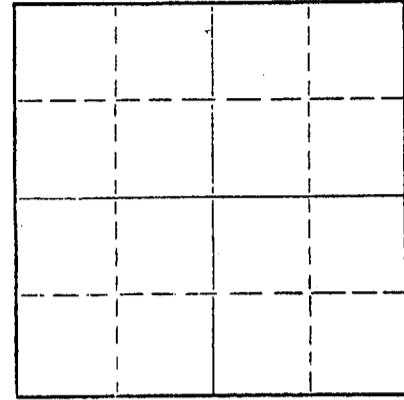

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	213'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug was set at 1200' with 100 cu. ft. cement
2nd plug was set at 215' with 25 cu. ft. cement
3rd plug was set at 40' with 10 cu. ft. cement

RECEIVED
STATE CORPORATION COMMISSION
MAY 11 1971
CONSERVATION DIVISION
Wichita, Kansas
5-11-1971

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Dreiling Oil, Inc.
Address Victoria, Kansas 67671

STATE OF KANSAS, COUNTY OF ELLIS, ss.

I, Leo F. Dreiling, Pres. of Drlg. Contr. (employee of contractor or conservation operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed, and that the same are true and correct. So help me God.

(Signature) Leo F. Dreiling
LEO F. DREILING, ROUTE 2, VICTORIA, KANSAS 67671
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of May, 19 71



Patty Dreiling
PATTY DREILING
Notary Public.

commission expires January 13, 1975

DREILING OIL, INC.

Victoria, Kansas 67671

WELL LOG

Company	Kaiser-Francis 4128 East 51st Tulsa, Oklahoma	74135 No.	2	Sec. 18	Twp. 8	Rng. 26
Farm	Karnes			Location	SW NW SE	
Total Depth	3716'			County	Sheridan	
Comm.	5-3-71	Comp.	5-7-71	Elevation:	2482'	K. B.
Contractor	Dreiling Oil, Inc. Victoria, Kansas 67671				2479'	D. F.
					2477'	G. R.

Casing Record

213' - 8 5/8"

Cement Record

165 sacks cement

Production:

D & A

Figures Indicate Bottom of Formations

0'	30'	Sand
30'	45'	Shale & Clay
45'	160'	Blue Shale
160'	213'	Shale
213'	1415'	Shale with Sand Streaks
1415'	1755'	Shale & Sand Streaks
1755'	1920'	Sand
1920'	2132'	Red Bed
2132'	2155'	Anhydrite
2155'	2168'	Anhydrite
2168'	2500'	Shale
2500'	2720'	Shale
2720'	2990'	Lime & Shale
2990'	3105'	Lime & Shale
3105'	3220'	Shale & Lime
3220'	3410'	Lime & Shale
3410'	3600'	Lime & Shale
3600'	3627'	Lime & Shale
3627'	3684'	Lime
3684'	3716'	Lime
3716'	T.D.	

RECEIVED
STATE CORPORATION COMMISSION

MAY 11 1971

CONSERVATION DIVISION
Wichita, Kansas

5-11-1971

STATE OF KANSAS)
)ss
COUNTY OF ELLIS)

I, Leo F. Dreiling, of Dreiling Oil, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from your Karnes #2.


Leo F. Dreiling

LEO F. DREILING

Subscribed and sworn to before me this 10th day of May, 1971.

Patty Dreiling

PATTY DREILING NOTARY PUBLIC



My commission expires: January 13, 1975