



15-141-20108-00-00

JOHN CARLIN
R. C. LOUX
JANE T. ROY
PHILLIP R. DICK
CAROL J. LARSON

Governor
Chairman
Commissioner
Commissioner
Executive Secretary

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

200 Colorado Derby Building
WICHITA, KANSAS 67202

September 5, 1981

VERBAL PERMIT FORM
(To be filed by Plugging Agent)

Dear Sir:

Mr. Ben Griffin of Emphasis Oil Operations has this date requested permission to plug the following described well:

Operator's Full Name: W-W Oil Company

Complete Address: Box 23, Natoma, Kansas 67651

Lease Name: Ward "E" Well No. 3

Location: 1080' FNL 750' FWL NW Sec. 35 Twp. 9 Rge. 15 ~~(E)~~ (W)

County: Osborne Total Depth: 3501'

Abandoned Oil Well Gas Well Input Well SWD Well D&A

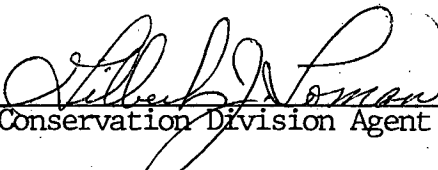
Other well as hereafter indicated: _____

Mr. Griffin was instructed to plug the well as follows:

8-5/8"-262'-180 sacks Anh. 1118-53* Elev. 1848 KB

Circulate hole and fill with mud. Pump 50 sacks cement through drill pipe at 870'. Pump 40 sacks cement through drill pipe at 310'. Fill hole with mud to 40'. Push plug and 1/2 sack hulls to 40' and cap hole with 10 sacks cement. Cement rathole with 10 sacks cement.

Very truly yours,


Conservation Division Agent

RECEIVED
STATE CORPORATION COMMISSION
09-09-1981
SEP - 9 1981
CONSERVATION DIVISION
Wichita, Kansas