


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

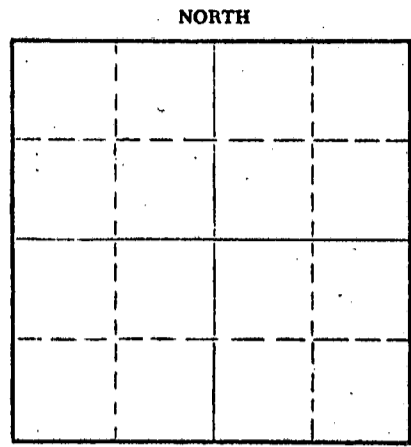

Locate well correctly on above  
Section Plat

Sedgwick County. Sec. 12 Twp. 26 Rge. 2 (E) (W)  
Location as "NE/CNWxSWx" or footage from lines C S/2 NW NW  
Lease Owner Clinton Oil Company  
Lease Name De Moss Well No. 4  
Office Address Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed May 14 19 58  
Application for plugging filed November 8 19 66  
Application for plugging approved November 14 19 66  
Plugging commenced 12/9/66 19  
Plugging completed 12/12/66 19  
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production Nov. 17 19 66  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Turpon  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2825 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	163	none
				5 1/2	2819	2446

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Raised mast, checked hole, sanded to 2815', set 15 sacks cement. Cleaned cellar, rigged up on 5 1/2", loaded hole with water. Shot pipe at 2477' and 2445', pulled 40 joints. Pulled 35 joints, set rock bridge at 205' and ran 20 sacks of mud to 40', 10 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION  
12-20-66  
DEC 20 1966

CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY  
Address CHASE, KANSAS

STATE OF Kansas, COUNTY OF Rice, ss.  
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight  
Chase, Kansas  
(Address)

Subscribed and sworn to before me this 15 day of Dec, 1966  
[Signature]  
Notary Public.



FRANCIS M. RAYMOND #4 DEMOSS  
 CS/2 NW NW, 12-26S-2E  
 Sedgwick County, Kansas

Contractor: Raymond Oil Co., Inc.

Commenced: 5/8/58  
 Completed: 5/14/58 (Rotary)

Elevation: 1332 KB

Casing: 8-5/8" @ 163'  
 5-1/2" @ 2819'

Cement: 150 sacks  
 50 sacks

Figures Indicate Bottom of Formation

Formation	Depth
Surface Hole	163
Lime with shale	510
Lime	600
Shale with Lime	1090
Shale with Shells	1565
Shale with lime	1920
Shale & shells	2110
Lime with shale	2810
Shale and Lime	2810
Chert	2825

RECEIVED  
 STATE CORPORATION COMMISSION  
 NOV 14 1966  
 CONSERVATION DIVISION  
 Wichita, Kansas

Tops:

Lansing	2127
Kansas City	2346
Base Kansas City	2509
Conglomerate sand	2757
Conglomerate Chert	2774
Mississippi	2789
Mississippi Chat	2816
Pay zone	2821
Rotary Total Depth	2825

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK )

I hereby certify that the above information is true and correct to the best of my knowledge.

*Francis M. Raymond*  
 Mike Raymond

Subscribed and sworn to before me this 19th day of May, 1958.

*Betty Baker*  
 Betty Baker  
 Notary Public

My Commission Expires