

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-173-20, 836-00-00

LEASE NAME Edson

WELL NUMBER B-2

TYPE OR PRINT

NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

4290 Ft. from S Section Line

990 Ft. from E Section Line

SEC. 12 TWP. 26 RGE. 2 (E) ~~XXXX~~

COUNTY Sedgwick

LEASE OPERATOR Ohae Bosim Medical Clinic, Inc.

ADDRESS 2810 East 21st, Wichita, KS 67214

PHONE#(316) 262-1296 OPERATORS LICENSE NO. 30178

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Date Well Completed 9-14-89

Plugging Commenced 9-14-89

Plugging Completed 9-14-89

The plugging proposal was approved on 9-14-89 (date)

by Dave Warn (KCC District Agent's Name).

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom T.D. 3148'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
	Surface	0	201	8-5/8	201	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet each set.
35 Sacks cement @ 3000'; 25 sacks cement @ 250'; 25 sacks cement @ 60'; 10 sacks cement in rathole

RECEIVED
STATE CORPORATION COMMISSION
9-18-89
SEP 18 1989
Licensing Division
Wichita, Kansas

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor EDCO Drilling Co., Inc. License No. 5676

Address 635 N. Metcalf, El Dorado, KS 67042

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: _____


STATE OF Kansas COUNTY OF Butler, ss.

(Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) W. K. Zehngraber

(Address) 635 N. Metcalf, El Dorado, KS 67042

Subscribed and sworn to before me this 15th day of September, 19 89

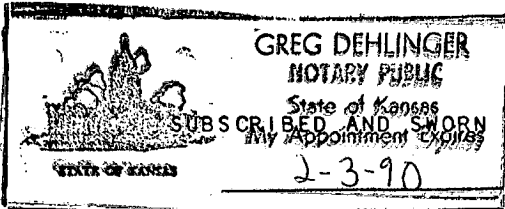


Greg Dehlinger
Notary Public

My Commission Expires: 2-3-90



DRILLING COMPANY, INC.



~~XXXXXXXXXX~~ P.O. BOX 645 — EL DORADO, KANSAS 67042
~~14 WEST LOCUST~~

September 15, 1989

To: Ohae Bosim Medical Clinic, Inc.
2810 East 21st
Wichita, KS 67214

Lease: Edson #B-2

Location: Sec. 12 Twp. 26 Rg. 2E
Sedgwick County, Kansas

Drilling Dates: September 6, 1989 through September 14, 1989

Drilling Log:

Surface TD: 209 ft.
Surface Set: 201 ft. of 8-5/8" surface casing
Cemented by: Halliburton Services W/150 sacks regular 3% CaCl
1/4# flocele

0 - 209	Surface hole
209 - 1276	Shale w/line streaks
1276 - 1314	Sand
1314 - 2165	Shale & lime
2165 - 2347	Lansing
2347 - 2496	Kansas City
2496 - 2527	Shale w/lime
2527 - 2577	Shale
2577 - 2646	Marmaton
2646 - 2730	Base Kansas City
2730 - 2793	Shale W/lime
2793 - 3100	Mississippi
3100 - 3146	Kinderhook
3146 - 3148	Hunton
3148	T.D.

RECEIVED
STATE REGULATION COMMISSION

SEP 18 1989

CONSERVATION DIVISION
Wichita, Kansas