




STATE OF KANSAS  
STATE CORPORATION COMMISSION

We also are in need of a well log on this well Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Sedgwick County, Sec. 12 Twp. 26 Rge. 2E (E) III(W)  
Location as "NE/CNW\*SW\*" or footage from lines. NE NE NE  
Lease Owner Bedell-Catt Drlg., Co.  
Lease Name Edson Well No. 2  
Office Address 701 Petroleum Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) D&A  
Date well completed 8/25/59 19  
Application for plugging filed 8/25/59 19  
Application for plugging approved 8/25/59 19  
Plugging commenced 8/25/59 19  
Plugging completed 8/25/59 19  
Reason for abandonment of well or producing formation \_\_\_\_\_

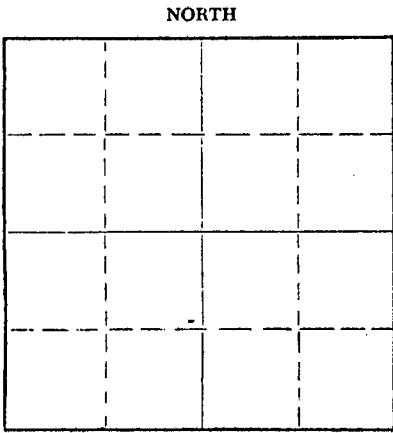

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Lee Guthrie  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3142' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.


2854' 5 1/2" Pipe set with 75 sacks cement. 140' 8 5/8" surface pipe set with 110 sacks cement. top perforation on 5 1/2" pipe at 2806. Hole filled with sand to 2800' and 5 sacks cement on top of that. At 180' set 15' Rock Bridge and 15 sacks cement. Hole mudded to 35' set 5' Rock Bridge and 10 sacks cement, which filled hole to plow surface. Welded cap on surface pipe. Recovered 2350' 5 1/2" Pipe.

RECEIVED  
STATE CORPORATION COMMISSION  
5-13-66  
MAY 13 1966

Name of Plugging Contractor Bert Sell Casing Pulling Company  
Address R. R. #4 - Hutchinson, Ks.

CONSERVATION DIVISION  
Wichita, Kansas

STATE OF Kansas, COUNTY OF Butler, ss.  
George W. Catt (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) George W. Catt  
Bay #27 Augusta Kansas  
(Address)  
James G. Davenport  
Notary Public.

SUBSCRIBED AND SWORN to before me this 12th day of May, 1966.  
My commission expires January 7, 1967.