


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Sedgwick County, Sec. 12 Twp. 26 Rge. 2 (E) (W)

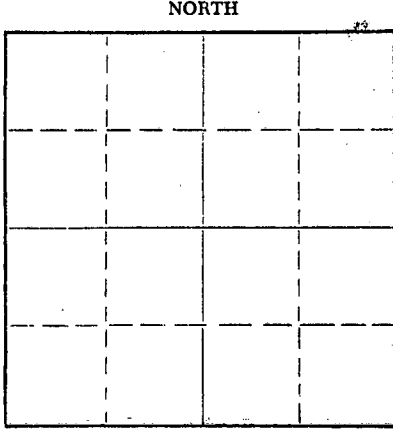

Locate well correctly on above Section Plat

Location as "NE/CNW&SW&" or footage from lines NENWNW
Lease Owner Aurora Gasoline Company
Lease Name DeMoss Well No. 1
Office Address 1107 Union Nat'l Bank Bldg., Wichita, Kans
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 3-8 19 57
Application for plugging filed 3-8 19 57
Application for plugging approved 3-8 19 57
Plugging commenced 3-8 19 57
Plugging completed 3-8 19 57
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Ruel E Durkee
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2885 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	103'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with heavy mud to 100'
Set bottom ~~mud~~ plug 100' 15 sacks poured thru drill pipe
Set 2nd plug 20' filled to surface with cement cut off below surface

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Drilling Company
Address Box 786, El Dorado, Kansas

STATE OF Kansas COUNTY OF Butler, ss.
O N Wilson, contractor (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) O. N. Wilson
O N Wilson

(Address)

SUBSCRIBED AND SWORN to before me this 12th day of March, 1957

My commission expires November 27, 1958

[Signature]
STATE CORPORATION COMMISSION Notary Public.



PLUGGING
FILE SEC. 12 T. 26 R. 2E
BOOK PAGE 147 LINE 28

MAR 13 1957
3-13-57
CONSERVATION DIVISION
Wichita, Kansas

WELL LOG

Operator: Aurora Gasoline Company
Comm. 2-27-1957 Comp. 3-8-1957
Shot _____ Qts. From _____ ft. To _____ ft.
Acidized _____ Gal. _____
Prod. Formation _____
Initial Prod. dry & abandoned
Elevation _____ cemented

Lease DeMoss Well No. 1
Loc NENWNW Sec 12 Twp 26 Rge 2E
County Sedgwick State Kansas
Contractor Red Drilling Company

		Casing Record		
Size	Ft.	Pulled	Remarks	
8 5/8	103'	w/80 sx		

FIGURES INDICATE BOTTOM OF FORMATION

- 35 surface soil & clay
 - 70 sand & shale
 - 103 lime & shale
 - 260 lime & shale w/Red Bed stks
 - 800 lime & shale
 - 1000 shale & shells
 - 2110 shale & lime
 - 2145 shale
 - 2374 lime w/shale
 - 2430 lime
 - 2803 lime w/shale
 - 2830 lime
 - 2834 chert
 - 2854 lime w/chert
 - 2885 lime
- TD 2885'

PLUGGING
 FILE SEC 12 T 26 R 2E
 BOOK PAGE 147 LINE 28