


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Sedgwick County. Sec. 12 Twp. 26 Rge. 2 (E) XXXXX

NORTH

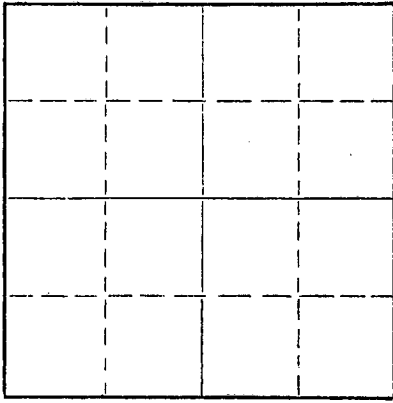

Locate well correctly on above
Section Plat

Location as "NE/CNW/SW" or footage from lines SE SW SW
Lease Owner Winne Oil Company
Lease Name Lygrisse Well No. 2
Office Address 3856 North Oliver, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 27, 1957 1957
Application for plugging filed " " 1957
Application for plugging approved " " 1957
Plugging commenced " " 1957
Plugging completed " " 1957
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee, Box 597, McPherson, Kansas
Producing formation Depth to top Bottom Total Depth of Well 2881 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	105'	None
				4-1/2"	2881'	2402'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with cement to 2860'. Dumped 6 sacks cement, shot off at 2402', pulled pipe. Bridge of wood and rock at 100' with 15 sacks cement. Filled with mud to 8'; another wood and rock bridge with 5 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bedell-Catt Drilling Company
Address 601 Union Center, Wichita 2, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.
Corb S. Bedell (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) BEDELL-CATT DRILLING COMPANY

By: Corb S. Bedell (Address) Partner

Subscribed and sworn to before me this 12th day of March, 1957.
Frances L. Webber Notary Public.

My commission expires March 18, 1958

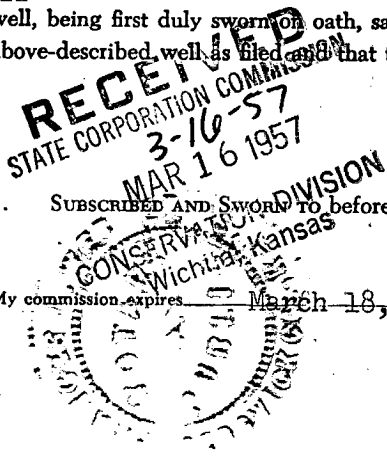

PLUGGING
FILE SEC. 12 T. 26 R. 2 E
BOOK PAGE 145 LI E 31

DRILLING LOG

Company: Winne Oil Company
3856 North Oliver
Wichita, Kansas.

Lease: Lygrisse

Well: #2

Location: SE SW SW of Section 12, Township 26, Range 2,
Sedgwick County, Kansas

Contractor: Bedell-Catt Drilling Company
601 Union Center
Wichita 2, Kansas

Date Comm: February 19, 1957

Date Comp: February 27, 1957

T.D.: 2881'

Production:

Casing: 8-5/8" to 105'/110 sacks cement
3 sacks CC
4-1/2" to 2881'

Figures Indicate the Bottom of Formation

0-110	Surface Hole
2392	Lime & Shale
2563	K. C. Lime
2578	Lime
2837	Lime & Shale
2881	Chert & Lime
2881'	T. D.

I certify the above to be true and correct to the best of my knowledge and belief.

BEDELL-CATT DRILLING COMPANY

By *Corb S. Bedell*
Corb S. Bedell

Subscribed and sworn before me this 1st day of March, 1957.

Frances L. Webber
Notary Public

My Commission Expires:

March 18, 1958

RECEIVED
STATE CORPORATION COMMISSION

MAR 16 1957

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC. 12 T. 26 R. 2E
BOOK PAGE 145 LINE 31