


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

15-069-00229-00-00

WELL PLUGGING RECORD

NORTH

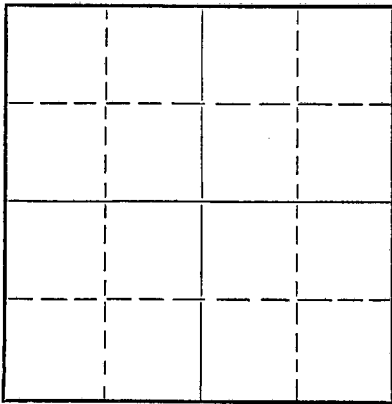

Locate well correctly on above
Section Plat

Graham County, Sec 1 Twp 9S Rge (E) 21(W)

Location as "NE/CNW 1/4 SW 1/4" or footage from lines NE, NE, NE

Lease Owner Jones, Shelburne & Farmer, Inc.

Lease Name St. Peter Well No 1

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 12-23 19 51

Application for plugging filed 12-23 19 51

Application for plugging approved 12-23 19 51

Plugging commenced 12-23 19 51

Plugging completed 12-23 19 51

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production Never Produced 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3757 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	165'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- Hole filled to 160' with heavy mud.
- Halliburton plug pushed to 160'.
- 1/2 sk hulls dumped on top of plug.
- 15 sks cement mixed and spotted on top of hulls.
- Hole filled to 40' from top.
- 2nd Halliburton plug pushed to 40'.
- 1/2 sk hulls dumped on top of plug.
- 10 sks cement mixed and hole filled with sand.

STATE CORPORATION COMMISSION
JAN - 2 1952
WICHITA, KANSAS
1-2-52

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Speer Drilling Company

Address Wichita, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
John O. Farmer, Vice-President (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John O. Farmer

(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of December, 1951

My commission expires October 24, 1955. Jerry S. Malstrom Notary Public.

