

15-065-02316-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittig Building
Wichita, Kansas

Graham County, Sec. 9 Twp. 9 Rge. 21 (W)

Location as "NE/CNW/SW" or footage from lines SW/4 NE/4 SW/4
Lease Owner Barnett Oil Company, Et Al
Lease Name Clack Well No. 3
Office Address 411 First Nat'l Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 17 19 56
Application for plugging filed - - 19
Application for plugging approved November 13, 19 56
Plugging commenced November 3, 19 56
Plugging completed November 8, 19 56
Reason for abandonment of well or producing formation Dry Hole

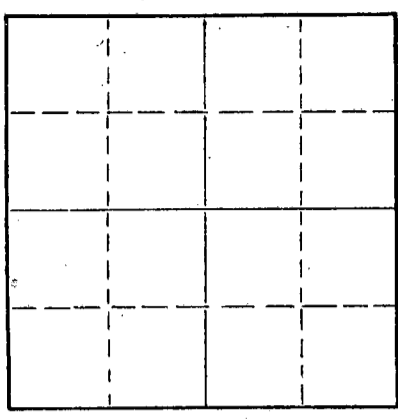

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production - - 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3740 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	145'	-0-
				5 1/2"	3698'	2935'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged off bottom with sand back to 3690'. Dumped 4 sacks of cement with bailer. Shot 5 1/2" casing at 2935'. Pulled pipe out of hole and plugged well with heavy mud to 150'. Set permanent rock bridge. Dumped 15 sacks of cement. Filled hole with heavy mud to 35'. Dumped 10 sacks of cement to bottom of cellar.

(Well Log attached)

RECEIVED
STATE CORPORATION COMMISSION

CONSERVATION DIVISION
Wichita, Kansas

12-20-56

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Forbes Casing Pulling Co.
Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
F. H. Rousey (employee of owner) or ~~owner or operator~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. H. Rousey
411 First Nat'l Bank Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 27th day of November, 19 56
My commission expires February 27, 1960.
Mildred F. Willis
Notary Public.



PLUGGING
FILE SEC 9 T 9 R 21 W
BOOK PAGE 115 LINE 41

BARNETT OIL COMPANY
 WELL LOG
 CLACK NO. 3, SW/4 NE/4 SW/4
SECTION 9-9S-21W, GRAHAM COUNTY, KANSAS

<u>From</u>	<u>To</u>	<u>Formation</u>
0	65	Surface Clay
65	75	Sand
75	145	Shale and Shells
145	700	Shale
700	1505	Sand and Shale
1505	1665	Shale
1665	1698	Anhydrite
1698	2295	Shale
2295	2485	Shale and Lime
2485	2595	Lime
2595	3170	Lime and Shale
3170	3310	Shale and Lime
3310	3700	Lime (Rotary Total Depth)

Set 145' of 8 5/8", 24# s.s. casing with
 125 sacks of cement.

Set 3698' of 5 1/2", 15# s.s. casing with
 125 sacks of cement.

CABLE TOOLS

3700	3706	Lime
3706	3707	Lime and Shale
3707	3712	Lime
3712	3715	Lime and Shale
3715	3718	Lime
3718	3733	Lime and Shale
3733	3736	Shale
3736	3740	Lime and Shale (T.D.) (D. & A.)

Pulled 2935' of 5 1/2", 15# s.s. casing.

STAMPED AREA
 ST. 1
 CO.

PLUGGING
 FILE SEC 9 T 9 R 21W
 BOOK PAGE 115 LINE 41