

15-163-20433-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Rooks County, Sec. 21 Twp. 8S Rge. (E) 18 (W)

Location as "NE/CNW&SW" or footage from lines NE SW SE
Lease Owner National Oil Co., Inc.

Lease Name Mosher Well No. 3
Office Address 200 W. Douglas Suite 550 - Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) dry

Date well completed 4-29 19 72

Application for plugging filed 4-29 19 72

Application for plugging approved 4-29 19 72


Plugging commenced 10:15 4-29 AM 19 72

Plugging completed 11:00-AM 4-29 19 72

Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production none 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

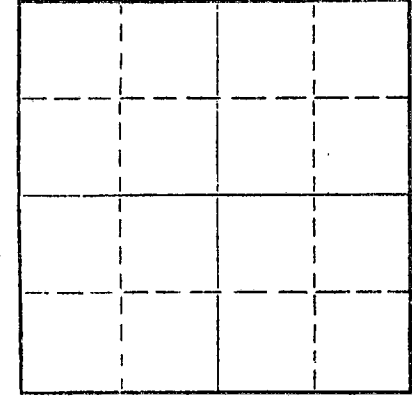

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 3450 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface soil		0	204	8 5/8"	204	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 550 w/70 sx plug @ 210 w/20 sx & bridge
plug @ 40; w/ 10 sx 2 sx in rat hole

RECEIVED
STATE CORPORATION COMMISSION

MAY 2 - 1972

CONSERVATION DIVISION
Wichita, Kansas

32-72

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor B & B Drilling, Inc.
Address 720 Union Center - Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Bill Lahar (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Lahar


720 Union Center - Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 1st day of May, 19 72

May 31, 1974

Alma A. Neises Notary Public.

My commission expires



15-163-20433-00-00

(316) 267-0613

B & B DRILLING, INC.
720 Union Center
Wichita, Kansas 67202

May 1, 1972

RECEIVED
STATE CORPORATION COMMISSION
MAY 2 - 1972
CONSERVATION DIVISION
Wichita, Kansas
5272

DRILLERS LOG

Re: Mosher # 3
NE SW SE Section 21-8S-10W
Rooks County, Kansas

OPERATOR: National Oil Co., Inc.
CONTRACTOR: B & B Drilling, Inc.
COMMENCED: April 21, 1972
COMPLETED: April 29, 1972
TOTAL DEPTH: 3450'

Set 8 5/8" @ 204' w/ 140 sx

0	204	Surface Hole	
204	850	Shale & Sand	
850	1060	Sand	
1060	1125	Shale	
1125	1357	Shale & Sand	
1357	1397	Anhydrite	
1397	1990	Shale	DST #1 3131 - 3155'
1990	2535	Shale & Lime	DST #2 3157 - 3177'
2535	2730	Shale & Lime	DST #3 3225 - 3235'
2730	3069	Lime	DST #4 3267 - 3330'
3069	3215	Lime	DST #5 3365 - 3370'
3215	3284	Lime	DST #6 3368 - 3410'
3284	3370	Lime	
3370	3410	Lime	
3410	3450	Arbuckle	
3450		R. T. D.	D & A

We certify the above and foregoing to be true and correct copy of the log on the # 3 Mosher, located in Rooks County, Kansas

Bill Sahar President

Alma A. Huser Notary Public
Subscribed and sworn to before me this 1st day of May, 1972. My commission expires May 31, 1974

