

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-025-21318-00-00  
Spot: W2SESE Sec/Twnshp/Rge: 32-34S-22W  
660 feet from S Section Line, 990 feet from E Section Line  
Lease Name: UNCLE JED Well #: 32 1  
County: CLARK Total Vertical Depth: 5848 feet

Operator License No.: 33392  
Op Name: KEITH F. WALKER OIL & GAS CO., LLC  
Address: 219 STANLEY ST PO BOX 1725  
ARDMORE, OK 73401

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		5087		WITH 10 SX CMT
COND 20		127		WITH 275 SX CMT
II 8.625		1222		WITH 500 SX CMT <b>190.06</b>
PROD 4.5		5848	2490	WITH 235 SX CMT
SURF 13.38		269		

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/14/2008 9:30 AM  
Plug Co. License No.: 33311 Plug Co. Name: PHIL DOLLAR OILFIELD SERVICES, INC.  
Proposal Rcvd. from: RIGO MADRINO Company: PHIL DOLLAR OILFIELD SERVICE Phone: (806) 435-3373

Proposed Plugging Method: CIBP @ 5100 & 10 SX CMT. PLUG AT 1230' WITH 50 SX CMT. PLUG AT 600' WITH 50 SX CMT. PLUG AT 270' WITH 25 SX CMT. PLUG AT 40-0' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 05/14/2008 10:30 AM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

CIBP @ 5087' WITH 10 SX CMT. 1ST PLUG AT 1230' WITH 50 SX CMT. 2ND PLUG AT 600' WITH 50 SX CMT. 3RD PLUG AT 270' WITH 25 SX CMT. 4TH PLUG AT 40' WITH 10 SX CMT. CMT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
5572	5578		
5170	5178		

**INVOICED**

DATE 6-16-08  
INV. NO. 2008061844

RECEIVED  
KANSAS CORPORATION COMMISSION


**MAY 29 2008**

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED CLASS A CMT BY PHIL DOLLAR OILFIELD SERVICES.

Plugged through: TBG

District: 01

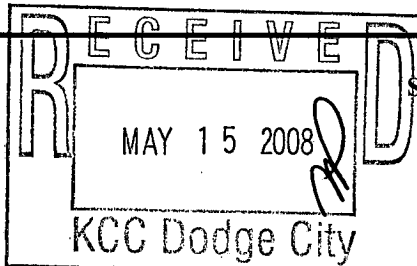

Signed

*Jerry W. Stapleton*  
PART II (TECHNICIAN)

Form CP-243

*[Handwritten signature]*