

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-24463-00-00  
Spot: NWSE Sec/Twnshp/Rge: 21-16S-24W  
1890 feet from S Section Line, 1990 feet from E Section Line  
Lease Name: TILLITSON Well #: 1  
County: NESS Total Vertical Depth: 4618 feet

Operator License No.: 30742  
Op Name: PALOMINO PETROLEUM, INC.  
Address: 4924 SE 84TH ST  
NEWTON, KS 67114

String	Size	Depth (ft)	Pulled (ft)	Comments
PC		1842		WITH 140 SX CMT
PROD	5.5	4615	0	WITH 160 SX CMT <b>150.09</b>
SURF	8.625	267		WITH 170 SX CMT

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/29/2008 3:30 PM  
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.  
Proposal Rcvd. from: PATRICK J. GERSTNER Company: PALOMINO PETROLEUM Phone: (785) 483-2627

Proposed Plugging Method: PUMP 35 SX CMT & 300# HULLS THEN GEL SPACER TO ANHYDRITE. CMT TO SURFACE. 50 SX CMT FOR BACKSIDE.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 04/29/2008 5:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMP 35 SX CMT - 300# HULLS - 15 SX GEL AND 180 SX CMT. MAXIMUM PRESSURE 1200#. SHUT IN PRESSURE 500#. TIED ONTO BACKSIDE AND PUMPED 30 SX CMT. PRESSURED TO 500# & HELD.

Perfs:

Top	Bot	Thru	Comments
4528	4535		

**INVOICED**

DATE 6-18-08  
INV. NO. 2008061855

RECEIVED  
KANSAS CORPORATION COMMISSION


**MAY 29 2008**

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: CSG

District: 01

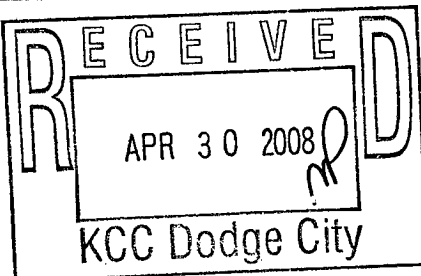

Signed

*Michael Maier*  
(TECHNICIAN)

Form CP-23

*PTA*