

Plugging

API# 15-119-10010-00-01

LOG-TECH INVOICE

23157

1011 240th Ave.

HAYS, KANSAS 67601

(785) 625-3858

Date 4-16-08

CHARGE TO: West Plains Enterprises
 ADDRESS _____
 R/A SOURCE NO. _____ CUSTOMER ORDER NO. oil
 LEASE AND WELL NO. Collingwood # 2 FIELD _____
 NEAREST TOWN _____ COUNTY meade STATE Ks
 SPOT LOCATION _____ SEC. _____ TWP. _____ RANGE _____
 ZERO 9.L. CASING SIZE 5.5 WEIGHT _____
 CUSTOMER'S T.D. _____ LOG TECH _____ FLUID LEVEL 1500
 ENGINEER S. Ernst OPERATOR S. Bates

PERFORATING

Description	No. Shots	From	Depth To	Amount
2 nd Casing Cutter				
2654				1050 00
- 6		0	2654	664 75
CLL 2653				
3 rd Casing Cutter				
2518				1050 00
- 6		0	2518	629 50
2512				
4 th Casing Cutter				
1824		0	1824	1050 00
- 6		0	1824	456 00
1818				

DEPTH AND OPERATIONS CHARGES

Description	From	Depth To	Total No. Ft.	Price Per Ft.	Amount
5 th Bridge Plug					300 00
Setting charge at 3050				min	1000 00
- 7					
3043.0					
2 nd Cement	0	3050		.20	610 00
1 st Casing Cutter					
2785					1050 00
- 6	0	2785		.25	696 25
CLL 2779					

MISCELLANEOUS

Description	Quantity	Amount
Service Charge		950 00
T.J. 8:00		
A.O.L. 7:45		
S.J. 9:25		
F.J. 4:00		
T.W.T. 2 hr		

RECEIVED
 KANSAS CORPORATION COMMISSION
 MAY 08 2008
 CONSERVATION DIVISION
 WICHITA, KS

PRICES SUBJECT TO CORRECTION BY BILLING DEPARTMENT

RECEIVED THE ABOVE SERVICES ACCORDING TO THE TERMS AND CONDITIONS SPECIFIED ON THE REVERSE SIDE TO WHICH WE HEREBY AGREE.

Customer Signature [Signature] Date _____

Sub Total	10,006 50
Tax	5820 00
IF PAID WITHIN 30 DAYS PAY DISCOUNT AMOUNT	3666 66
	6116 66

H2 Plains, LLC
P.O. Box 346
Ness City, KS 67560

Invoice


Phone #	Fax #
785-798-3995	785-798-2592

Date	Invoice #
4/19/2008	4252
WORK TICKET #S	
28722 - 28724	

Bill To
West Plains Enterprises, Inc. c/o Clawson Office P.O. Box 279 Plains, KS 67869

Description	RIG #	LEASE	
	7	Collingwood #2	
	Hours	Rate	Amount
4-15 Drove to the location, spotted the rig in, shut down for the night.			
Rig #7	3	189.00	567.00T
12% Fuel Surcharge	567	0.12	68.04T
4-16 Drove to the location, rigged up, pulled up on the 5 1/2" casing, the slips were stuck, cut them 4 different times, got the slips out, laid down 5 joints, shut down for the night.			
Rig #7	12	189.00	2,268.00T
12% Fuel Surcharge	2,268	0.12	272.16T
Pipe Dope (1 Trip)	1	50.00	50.00T
Tubing Tongs	1	125.00	125.00T
Solvent	5	4.00	20.00T
5 1/2" Casing Tools	1	250.00	250.00T
4-17 Drove to the location, spotted 50 sacks of cement, laid down 23 joints, spotted another 50 sacks of cement, finished pulling out the casing, cemented the well up to surface, took off the casing head, rigged down, cleaned up the location, moved off.			
Rig #7	11	189.00	2,079.00T
12% Fuel Surcharge	2,079	0.12	249.48T
Tubing Tongs	1	125.00	125.00T
Solvent	5	4.00	20.00T
MEACO Sales Tax		6.30%	383.90
Total			\$6,477.58

RECEIVED
KANSAS CORPORATION COMMISSION
MAY 08 2008
CONSERVATION DIVISION
WICHITA, KS

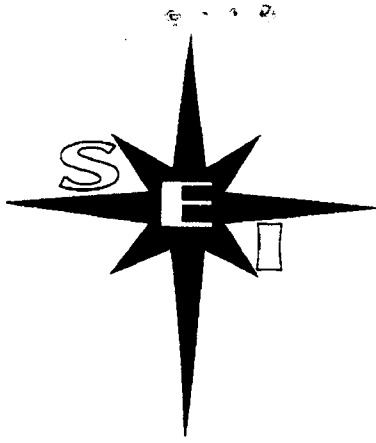

Schmidt Engineering, Inc.

1321 West 93rd North • Valley Center, Kansas • 67147 • (316) 755-3523

WEST PLAINS ENTERPRISES

**Collingwood #2 SWD
Sec. 36, T32S-R30W
Meade County, Kansas**

Well Plugging Report

04/16/08: Rig up Plains – set cast iron bridge plug @ 6050' w/ 2 sks cement on top. Found casing free @ 2920' – top cement – attempt cut-off @ 2785', 2659', 2518' – pipe would not come free – rig up Basic Energy – pump 80' bbl water in annulus between 5 1/2" x 8 5/8" – did not load @ 2 BPM. Cut off @ 1824' – came free – pull 5 jts 5 1/2" to 1610'. KCC did not want to start plugging operation until AM. SDFN

04/17/08: Basic Energy Services mixed 15 sxs gell & 50 sxs 60/40 poz w/ 4% gel & spot -1600' b. Balance cement @ 1575'. Pull casing to 610'. Mix & pump 50 sxs 60/40 + 4% gel – spot cement plug @ 600'. Pull 5 1/2" casing to 40' – mix & pump 60 sxs 60/40 poz w/ 4% gel – fill to 8 5/8" to surface – casing standing full @ 5'. Rig down Basic & plains. W & L moved 5 1/2" casing off location & fill cellar & circulating pit. Dilco emptied pit & hauled water to commercial disposal. Plug witnessed by Jerry Staplton.

JOB COMPLETE

Charles Schmidt
Petroleum Engineer

Allan Walker
Field Supervisor

RECEIVED
KANSAS CORPORATION COMMISSION

MAY 08 2008

CONSERVATION DIVISION
WICHITA, KS