



15-141-20150-00-00

JOHN CARLIN
R. C. LOUX
JANE T. ROY
PHILLIP R. DICK
CAROL J. LARSON

Governor
Chairman
Commissioner
Commissioner
Executive Secretary

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

200 Colorado Derby Building
WICHITA, KANSAS, 67202

September 15, 1982

RECEIVED
STATE CORPORATION COMMISSION

SEP 24 1982

VERBAL PERMIT FORM
(To be filed by Plugging Agent)

CONSERVATION DIVISION
Wichita, Kansas

Dear Sir:

Mr. Burton Beery of Shields Drilling Co., Inc. has this date requested permission to plug the following described well:

Operator's Full Name: Shields Oil Producers, Inc. 5184

Complete Address: Box 209, Russell, Kansas 67665

Lease Name: Luhman Well No. 1

Location: NE NE N/W Sec. 6 Twp. 9 Rge. 15 (E) (W)

County: Osborne Total Depth: 3660'

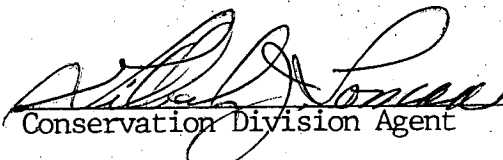
Abandoned Oil Well Gas Well Input Well SWD Well D&A

Other well as hereafter indicated: _____

Mr. Beery was instructed to plug the well as follows:

Circulate hole and fill with mud. Pump 50 sacks cement through drill pipe at 1100'. Pump 30 sacks cement through drill pipe at 400'. Fill hole with mud to 40'. Push plug and 1/2 sack hulls to 40' and cap hole with 10 sacks cement. Cement rat hole with 10 sacks cement. Cement mouse hole with 10 sacks. Elev. 2035 KB Anhydrite 1299'-1331'

Very truly yours,


Conservation Division Agent