


15-163-30194-00-00 R

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

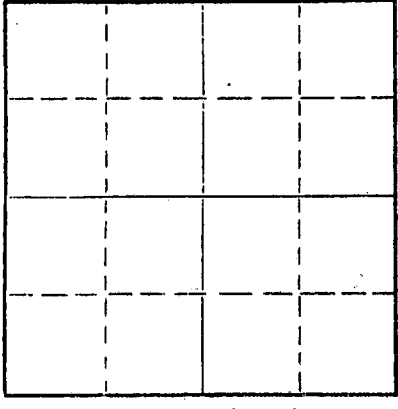

Locate well correctly on above
Section Plat

Rooks County. Sec. 4 Twp. 9 Rge. 16 (E) (W) X
Location as "NE/CNWxSWx" or footage from lines SE/SW/NW
Lease Owner Leben Oil Corp.
Lease Name Webster Well No. 1
Office Address Box 486 Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed May 10 19 72
Application for plugging approved _____ 19____
Plugging commenced June 22 19 72
Plugging completed June 24 19 72
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3390 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	185	None
				4 1/2	3388	861.73'


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured TD at 930 ft. Dumped 10 ft. sand and 4 sacks cement. Shot casing at 875 ft. Pulled a total of 28 ft. of 4 1/2" casing. Sun squeezed well with 3 sacks hulls, 20 sacks gel and 100 sacks 50/50 pozmix cement with 4% added gel.

RECEIVED
STATE CORPORATION COMMISSION
JUN 27 1972
6-27-1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Engineering, Inc.
Address Box 698 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold James W. Rockhold
Box 698 Great Bend, Kansas 67530
(Address)

Subscribed AND SWORN to before me this 26th day of June, 19 72

Cathy Miller
Cathy Miller Notary Public.

My commission expires September 30, 1975

RECEIVED
STATE CORPORATION COMMISSION
5-11-1972
CONSERVATION DIVISION
Wichita, Kansas

DRILLER'S LOG

COMPANY: Leben Drilling, Inc.
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: WEBSTER #1
 LOCATION: SE SW NW Sec. 4-9S-16W
 ROOKS COUNTY, KANSAS
 COMMENCED: 5-17-66
 COMPLETED: 5-17-66

0	185	Clay, Sand
185	790	Shale
790	960	Sand, Shale
960	1134	Redbed, Shale
1134	1786	Redbed
1286	1316	Anhydrite
1316	1725	Shale, Shells
1725	2030	Shale, Lime
2030	2445	Lime, Shale
2445	2735	Shale, Lime
2735	2915	Lime, Shale
2915	3046	Lime
3046	3140	Lime, Shale
3140	3390	Lime
	<u>3390</u>	<u>RTD - Set 4 1/2" Casing</u>

Set 8 5/8" used surface casing to 185' with 150 sks. Common, 7% cc

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Webster #1 well, located SE SW NW of Section 4, Township 9 South, Range 16 West, Rooks County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite
 Leslie Kite

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 19th day of May, 1966.

Emma Moxter Benoit
 Emma Moxter Benoit

My Commission Expires:
October 19, 1968