

15-141-20108-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Osborne County. Sec. 35 Twp. 9S Rge. 15W H/
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
1080' FNL & 750' FWL

Lease Owner W-W Oil Company
Lease Name Ward 'E' Well No. 3

Office Address P. O. Box 23, Natoma, KS 67651
Character of Well (Completed as Oil, Gas or Dry Hole)

Dry Hole
Date Well completed 9-5-1981
Application for plugging filed 9-5-1981
Application for plugging approved 9-5-1981
Plugging commenced 9-5-1981
Plugging completed 9-5-1981


Reason for abandonment of well or producing formation
Dry Hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Thoman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____

Show depth and thickness of all water, oil and gas formations.

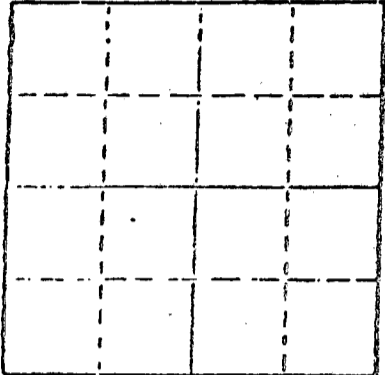

Locate well correctly on above
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	267'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud laden fluid 3501' - 870'
50 sks of cement @ 870'
40 sks of cement @ 310'
10 sks of cement @ 40'
10 sks of cement @ rat hole.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Emphasis Oil Operations

STATE OF KANSAS COUNTY OF RUSSELL, ss.

Joe K. Branum (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

Rec'd
09-10-1981

(Signature)

Joe K. Branum
P. O. Box 506, Russell, KS 67665-0506
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of September, 1981.

Glenda R. Tiffin
Glenda R. Tiffin Notary Public.

My commission expires February 6, 1984.



15-141 - 20108-00-00

EMPHASIS OIL OPERATIONS

P. O. Box 506

Russell, Kansas 67665-0506

DRILLERS LOG

OPERATOR: W-W Oil Company
P. O. Box 23
Natoma, Kansas 67651

CONTRACTOR: Emphasis Oil Operations
P. O. Box 506
Russell, Kansas 67665-0506

LEASE: Ward 'E' WELL: #3

LOCATION: 1080' FNL & 750' FWL
Section 35-9S-15W
Osborne County, Kansas

Total Depth: 3501'

Elevation:

Commenced: 8-10-81

Completed: 9-5-81

Casing: 8-5/8" @ 267' with 175 sks cement

Status: Dry Hole

DEPTHS & FORMATIONS

(All measurements from K.B.)

Topsoil & Sand	30'	Shale & Lime	2731'
Sand & Shale	1025'	Lime	2856'
Shale	1118'	Lime & Shale	3124'
Anhydrite	1151'	Lime	3478'
Shale	1676'	Lime, Chert & Shale (R.T.D.)	3501'

STATE OF KANSAS)
) ss:
COUNTY OF RUSSELL)

I, Joe K. Branum, of Emphasis Oil Operations, state that the above and foregoing is a true and correct log of the above captioned well.



Joe K. Branum


RECEIVED
STATE CORPORATION COMMISSION

SEP 10 1981

CONSERVATION DIVISION
Wichita, Kansas

Subscribed and sworn to before me this 9th day of September, 1981.
My Commission Expires: February 6, 1984.





Notary Public