


15-141-00032-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Osborne County. Sec. 36 Twp. 9S Rge. 15W (E) (W)  
Location as "NE/CNW/SW" or footage from lines NE NE SE  
Lease Owner L. B. Stableford  
Lease Name Meyer Well No. 1  
Office Address 1005 Central Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed November 2 1952  
Application for plugging filed November 2 1952  
Application for plugging approved November 2 1952  
Plugging commenced 8:00 a.m., November 2 1952  
Plugging completed 4:00 p.m., November 2 1952  
Reason for abandonment of well or producing formation  
Commercial quantity of oil not found  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

NORTH

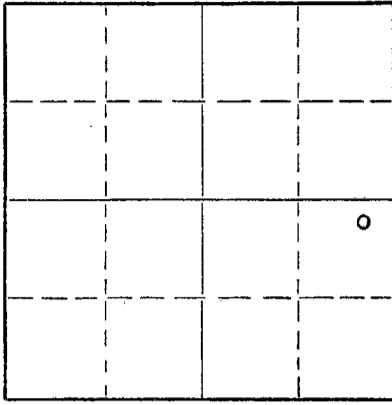

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"		None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set tap plug at 35 feet, Cemented with 10 sacks to bottom cellar - tearing down -  
Bottom plug at 270' with 20 sacks cement

STATE CORPORATION COMMISSION  
NOV - 6 1952  
11-06-1952  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor K & E Drilling, Inc.  
Address 1006 Central Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Clinton Engstrand, agent for (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Clinton Engstrand  
1006 Central Bldg., Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 5 day of November, 1952

Waldemar [Signature]  
Notary Public.

My commission expires 10-29-55

**PLUGGING**  
FILE SEC 36 9 R 152  
BOOK PAGE 56 LINE 31

15-141-00032-00-00

L. B. STABLEFORD  
MEYER NO. 1

NE NE SE Sec. 36-9S-15W  
Osborne County, Kansas

Comm: 10-18-52  
Comp: 11-2-52


Casing  
8 5/8" Set @ 271'

Cement  
125 Sacks


<u>FORMATION</u>	<u>DEPTH</u>
Sand - clay	0 - 35
Sand	35 - 75
Shale and shells	75 - 173
Shale (strks. of sand)	173 - 271
Shale and shells	271 - 435
Sand and shale	435 - 508
Shale	508 - 600
Sand and shale	600 - 705
Shale and pyrite	705 - 908
Red bed and shale	908 - 1178
Anhydrite	1178 - 1209
Lime and shale (shells)	1209 - 1314
Shale and shells	1314 - 1715
Lime and shale	1715 - 2178
Lime	2178 - 2258
Lime and shale	2258 - 2505
Shale	2505 - 2635
Shale and shells	2635 - 2688
Shale and lime	2688 - 2784
Lime	2784 - 2815
Shale	2815 - 2875
Shale and lime	2875 - 2955
Lime	2955 - 3056
Lime and shale breaks	3056 - 3133
Lime (streaks of shale)	3133 - 3186
Shale and lime	3186 - 3227
Lime	3227 - 3268
Lime and shale (dense)	3268 - 3315
Lime	3315 - 3377
Lime and shale	3377 - 3466
Lime	3466 - 3500
Lime and shale	3500 - 3618
Conglomerate	3618 - 3663
Lime and shale	3663 - 3826
Arbuckle	3826 - 3867

STATE OF KANSAS )  
                          ) SS  
SEDGWICK COUNTY )

I hereby certify that the above information is true and correct to the best of my knowledge.



Subscribed and sworn to before me this 5 day of November, 1952.

  
Notary Public

My Commission Expires: 10-29-55

**PLUGGING**  
FILE SEC 36 T 9 R 153  
BOOK PAGE 56 LINE 31