


Give All Information Completely.  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

WELL PLUGGING RECORD

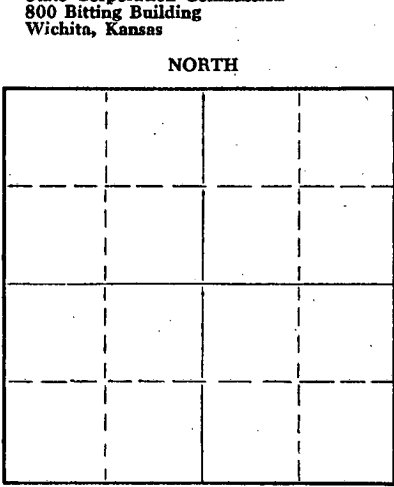

Locate well correctly on above Section Plat

Sedgwick County. Sec. 20 Twp. 26 Rge. 2 (E)X (W)  
Location as "NE/CNW&SW" or footage from lines N/2 of Sw/4  
Lease Owner Ray Law and Larry Moore Ranch, Inc.  
Lease Name Sample Well No. 1  
Office Address McPherson, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil well  
Date well completed Nov 29 19 54  
Application for plugging filed August 19 54  
Application for plugging approved 19  
Plugging commenced August 31 19 54  
Plugging completed September 4 19 54  
Reason for abandonment of well or producing formation Very little oil & too much water

If a producing well is abandoned, date of last production May 19 54  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee  
Producing formation Burgess Sand Depth to top 2949 Bottom 2949 Total Depth of Well 2949 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5-1/2"		2506'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with sand from 2949' to 2935' and ran 6 sacks of cement. Mudded hole to 150', set a rockbridge and ran 15 sacks of cement. Mudded hole to 3' and ran 3 sacks of cement on top. Plugging completed.

**RECEIVED**  
STATE CORPORATION COMMISSION  
NOV - 6 1954  
11-6-54  
CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor West Supply Co., Inc.  
Address Chase, Kansas

STATE OF Kansas COUNTY OF McPherson, ss.  
Floyd E. Lietz (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Floyd E. Lietz

SUBSCRIBED AND SWORN TO before me this 5 day of Nov, 19 54  
My commission expires Jan 17, 1957  
Carroll D. Winslow Notary Public.



**PLUGGING**  
FILE SEC 20 26 25  
BOOK PAGE 62 LINE 1

WELL LOG

The Black Supply Company, Inc - Production Department - Sample C-1, North Half of the Southwest Quarter of Section 20 Township 26S, Range 2E, Sedgwick County, Kansas, containing 80 acres, more or less

Spudded - November 1, 1950  
Completed - November 29, 1950

Pipe Record

15 $\frac{1}{2}$ " - 80 ft.  
13  $\frac{3}{8}$ " - 945 ft.  
10" - 1735 ft.  
8" - 2580 ft.  
5 $\frac{1}{2}$ " - 2945 ft.

Water Record

1 $\frac{1}{2}$  Bailers - 870 ft.  
1 $\frac{1}{2}$  Bailers - 1435-45 ft.  
2 $\frac{1}{2}$  Bailers - 1975-1985 ft.  
2 Bailers - 2285-2295 ft.  
H.F.W - 2565-2580 ft.  
1 $\frac{1}{2}$  Bailers - 2645-50 ft.

Tops

2130' - Lansing Lime  
2498' - Kansas City Lime  
2944' - Burgess Sand

Elevation

1382' - Derrick Floor  
1379' - Ground

**RECEIVED**  
STATE CORPORATION COMMISSION  
NOV - 6 1954  
CONSERVATION DIVISION  
Topeka, Kansas

**PLUGGING**  
WELL SEC 20 T 26 R 2 E  
BOOK PAGE 62 LINE 1