


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Sedgwick County. Sec. 21 Twp. 26 Rge. 2 (E) E (W)
Location as "NE/CNW4SW4" or footage from lines SW NE NE
Lease Owner George P. Vye
Lease Name Hatch Well No. 1
Office Address 1006 Central Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 16 1958
Application for plugging filed October 16 1958
Application for plugging approved October 16 1958
Plugging commenced October 16 1958
Plugging completed October 16 1958
Reason for abandonment of well or producing formation no oil in commercial quantities found
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

NORTH

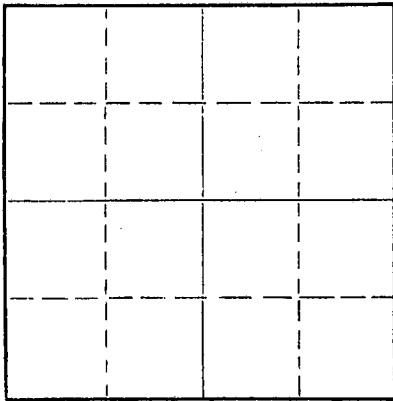

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2990 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				169'	8-5/8"	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with extra heavy rotary mud from total depth to 190', bridge plug and 15 sacks cement. Filled hole with extra heavy rotary mud to 40' and 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor CAPITT DRILLING, INC.
Address 814 Union Center, Wichita, Kansas


STATE OF KANSAS, COUNTY OF Sedgwick, ss.
R. R. McNicol (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. R. McNicol
814 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to Before me this 21st day of October, 19 58

My commission expires September 30, 1959

Darlene May
Darlene May **RECEIVED** Notary Public.
STATE CORPORATION COMMISSION

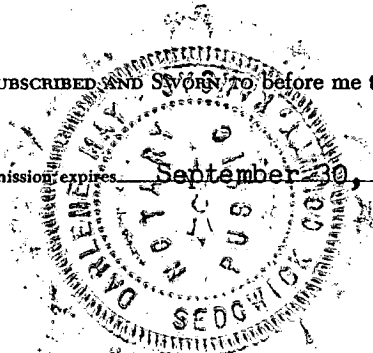

PLUGGING
FILE SEC 21 T 26 R 2E
BOOK PAGE 138 LINE 27

OCT 22 1958
10-22-58
CONSERVATION DIVISION
Wichita, Kansas

ROTARY DRILLING LOG

OPERATOR: George P. Vye
HATCH NO. 1
SW NE NE Sec. 21-26-2E,
Sedgwick County, Kansas

CONTRACTOR: Capitt Drilling, Inc.
COMM: 10/8/58
COMP: 10/16/58

Remarks: Set 169' of 8-5/8" surface casing cemented with 150 sacks cement

Formations:

Clay & Lime	168'
Lime & Shale	824'
Shale & Lime	1705'
Lime & Shale	1905'
Shale & Lime	2162'
Lime & Shale	2314'
Lime	2323'
Lime & Shale	2500'
Lime	2625'
Lime & Shale Streaks	2760'
Lime	2840'
Lime & Sand	2920'
Lime	2990'
Rotary Total Depth (D&A)	2990'

We certify the above log is true and correct to the best of our knowledge and belief.

CAPITT DRILLING, INC.

R. R. McNicol

R. R. McNicol

PLUGGING
FILE SEC. 21 T. 26 R. 2E
BOOK PAGE 130 LINE 27

RECEIVED
STATE CORPORATION COMMISSION
OCT 22 1958
CONSERVATION DIVISION
Topeka, Kansas