


*[Handwritten mark]*

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

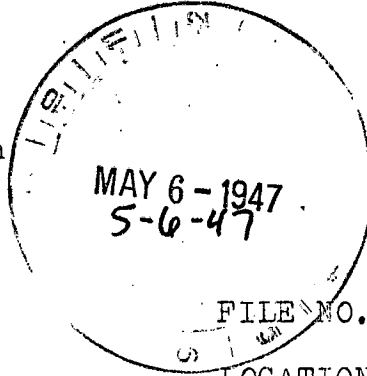

FILE NO. 106-42  
LOCATION SW SE SW  
SEC. 22 TWP. 26 RGE. 2E

Dry Hole \_\_\_\_\_ Abandoned Oil Well X Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 1 Lease Stollie  
Operator Beech Aircraft Corp Address c/o John P. Gaty  
Wichita, Kansas  
Field GREENWICH South County Sedgwick  
Total Depth 2909 Feet.

(Describe briefly the manner in which the well was plugged)

5 sq of cement in bottom of hole Mud from  
2909 to 175' 10' foot Rock Bridge from 175' to 165'  
15 sq of cement from 165' to 150' Mud from  
150' to 15' of surface. 10' Rock Bridge with  
5 sq of cement and filled to surface.

**PLUGGING**  
FILE SEC 22 T 26 R 2E  
BOOK PAGE 106 LINE 42

S. S. Greider  
District Conservation Agent  
Date May 5, 1947