


15-163-19166-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH



Locate well correctly on above
Section Plat

Rooks _____ County. Sec. 1 Twp. 9 Rge. 16 (E) _____ (W) X
Location as "NE/CNW/SW" or footage from lines SW SW SW
Lease Owner Braden-Deem, Inc.
Lease Name Sarver Well No. #1
Office Address Suite 520 200 E. First Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced _____ 11-22-71 _____ 19____
Plugging completed _____ 11-26-71 _____ 19____
Reason for abandonment of well or producing formation _____
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3460' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3459'	897.17'
				8 5/8"	239'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 3200'. Mixed and ran 3 sacks cement thru dump bailer.
Squeezed hole with 3 sacks hulls, 17 sacks gel, 70 sacks cement, 8 sacks gel.
Released plug and displaced with 55 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
NOV 29 1971
CONSERVATION DIVISION
Wichita, Kansas


11-29-71

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W C Spence Sec.
Box 364 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 27 day of November, 19 71

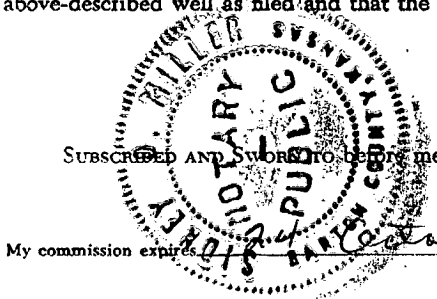

Sidney D. Miller
Notary Public.

ROTARY DRILLING LOG

OPERATOR: Goering - Hedrick
CONTRACTOR: D & D Drilling Company, Inc.
WELL: Sarver #1
SW/4 Sec. 1-9S-16W
Rooks County, Kansas

COMM: 7-24-62
COMP: 8-1-62

FORMATIONS:

REMARKS:

Shale 239'
Shale 1535'
Shale & Shells 1920'
Shale 2155'
Shale & Lime 3039'
Lime 3460'

Rotary Total Depth 3460'

Set 8 5/8" surface casing at 239' cemented with 175 sacks cement.

Set 4 1/2" casing at 3459' cemented with 125 sackd of salt cement.

A F F I D A V I T

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

RECEIVED
STATE CORPORATION COMMISSION
SEP 9 1971
CONSERVATION DIVISION
Wichita, Kansas
11-9-71

James R. Daniels of lawful age, being duly and solemnly sworn on oath says: I am a resident of Wichita, Sedgwick County, Kansas, and I hereby know on oath state, that the above drilling log covering the Sarver #1, located in SWc of Section 1-9S-16W, Rooks County, Kansas, is true and correct to the best of my knowledge and belief, further affiant saith not.

D & D Drilling Company, Inc.

James R. Daniels
James R. Daniels

Subscribed and sworn to before me this 3 day of August, 1962.

Colleen Chapple
Colleen Chapple - Notary Public

My Commission Expires November 18, 1962.