

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-101-22085-00-00  
Spot: E2E2W2SW Sec/Twnshp/Rge: 1-19S-30W  
1320 feet from S Section Line, 1155 feet from W Section Line  
Lease Name: RISLEY Well #: 1  
County: LANE Total Vertical Depth: 4660 feet

Operator License No.: 6569  
Op Name: SCHMITT, CARMEN, INC.  
Address: PO BOX 47  
GREAT BEND, KS 67530

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	215		WITH 160 SX CMT

157.45

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/17/2008 1:00 AM  
Plug Co. License No.: 33793 Plug Co. Name: H2 DRILLING LLC  
Proposal Rcvd. from: WES PFAFF Company: H2 DRILLING LLC Phone: (620) 636-2090

Proposed Plugging Method: 1ST PLUG AT 2250' WITH 50 SX CMT. 2ND PLUG AT 1500' WITH 80 SX CMT. 3RD PLUG AT 750' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: LINDLEY REIMER Witness Type: NONE  
Date/Time Plugging Completed: 05/17/2008 3:00 AM KCC Agent: LINDLEY REIMER

Actual Plugging Report:

1ST PLUG AT 2250' WITH 50 SX CMT. 2ND PLUG AT 1500' WITH 80 SX CMT. 3RD PLUG AT 750' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:


INVOICED  
DATE 6-30-08  
INV. NO. 2008061909

RECEIVED  
KANSAS CORPORATION COMMISSION  
JUN 13 2008  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

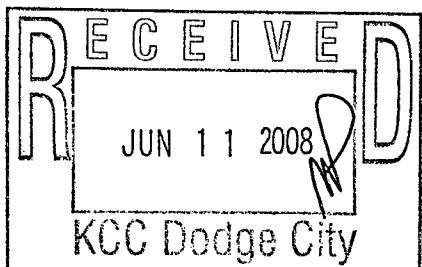

Signed \_\_\_\_\_

*[Signature]*  
(TECHNICIAN)

*[Signature]*