

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-097-21636-00-00

Spot: SENWSE

Sec/Twnshp/Rge: 27-30S-17W

1650 feet from S Section Line,

1550 feet from E Section Line

Lease Name: CROMER

Well #: 2-27

County: KIOWA

Total Vertical Depth: 5277 feet

Operator License No.: 30129

Op Name: EAGLE CREEK CORPORATION

Address: 150 N MAIN STE 905
WICHITA, KS 67202

String Size Depth (ft) Pulled (ft) Comments

SURF 8.625 1066

WITH 410 SX CMT

171.50

Well Type: DH

UIC Docket No:

Date/Time to Plug: 06/09/2008 10:55 AM

Plug Co. License No.: 5142

Plug Co. Name: STERLING DRILLING COMPANY

Proposal Rcvd. from: KEN MAGUIRE

Company: STERLING DRILLING COMPANY

Phone: (620) 672-9508

Proposed Plugging Method: 1ST PLUG AT 1090 WITH 50 SX CMT. 2ND PLUG AT 660' WITH 50 SX CMT. 3RD PLUG AT 300' WITH 40 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 06/09/2008 12:35 PM

KCC Agent: ERIC MACLAREN

Actual Plugging Report:

Perfs:

SURFACE PIPE PARTED . BOTTOM OF CASING AT 644'. 70' VOID FROM 644-714'. CASING FELL TO 1136'. 1ST PLUG AT 1090 WITH 50 SX CMT. 2ND PLUG AT 660' WITH 50 SX CMT. 3RD PLUG AT 300' WITH 40 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT. CMT CIRCULATED.

INVOICED

DATE 6-30-08
INV. NO. 2008061920

RECEIVED
KANSAS CORPORATION COMMISSION


JUN 16 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: DP

District: 01

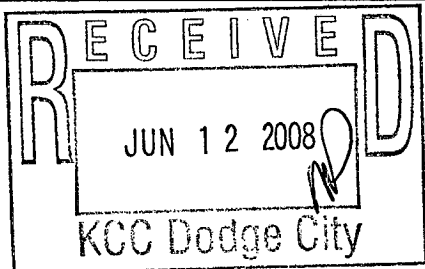

Signed Eric MacLaren
(TECHNICIAN)

Handwritten initials and signatures