

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-12621-00-00
Spot: E2NESE Sec/Twnshp/Rge: 22-21S-12W
2026 feet from S Section Line, 309 feet from E Section Line
Lease Name: ROSE Well #: 1
County: STAFFORD Total Vertical Depth: 3604 feet

Operator License No.: 5430
Op Name: ENERGY THREE, INC.
Address: 1437 OLD SQ RD STE 201A
JACKSON, MS 39211

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3586		
SURF	8.625	293		117.13

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 05/19/2008 2:30 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC. Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 50' ABOVE PERFS & 5 SX CMT OR CIBP 50' ABOVE PERFS & 2 SX CMT. PERFORATE AT 700'. RUN TBG TO 700'. CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: JACK MACLASKEY Witness Type: NONE
Date/Time Plugging Completed: 05/20/2008 1:00 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

PUMPED 50 SX CMT THROUGH TBG @ 3580'. PERFORATED 5 1/2" AT 700'. RAN TBG TO 720' & PUMPED 370 SX CMT HAD CMT TO SURFACE UP 5 1/2" & 8 5/8" X 5 1/2" ANNULUS. PULLED TBG & CMT GOING DOWN HOLE. SDON. RAN TBG TO 720'. PUMPED 65 SX CMT TO SURFACE. RAN 1" TBG DOWN 8 5/8" X 5 1/2" & TAGGED CMT AT 290'. PUMPED 60 SX CMT FILLING TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
3586	3604	OH	

INVOICED
DATE 6-30-08
INV. NO. 2008061921

RECEIVED
KANSAS CORPORATION COMMISSION


JUN 06 2008

Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND ACID.

Plugged through: TBG

CONSERVATION DIVISION
WICHITA, KS

District: 01

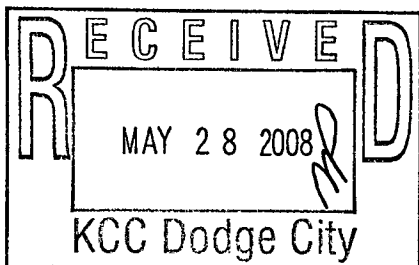

Signed

Richard W. Lacey

(TECHNICIAN)

Form CP-2/3