

(see rules on reverse side)

API Number 15—

E/2 SW SE... Sec...17. Twp.10... S, Rg.20..... X West
660..... Ft. from South Line of Section
1650..... Ft. from East Line of Section

Nearest lease or unit boundary line660.....feet
County.....Rooks.....

Lease Name..Thomason..... Well #.....1.....
Ground surface elevation2223.....feet MSL

Domestic well within 330 feet: yes X no
Municipal well within one mile: yes X no

Depth to bottom of fresh water.....180'
Depth to bottom of usable water1000'

Surface pipe by Alternate: 1 2 X
Surface pipe planned to be set already set @ 254' w/ 140 sx

Conductor pipe required none
Projected Total Depth .. 3880 feet
Formation Arbuckle

Date 06-23-87..... Signature of Operator or Agent H. K. Stegma..... Title... President.....

Conductor Pipe Requiredfeet; Minimum Surface Pipe Requiredfeet per Alt. 259 XC2
This Authorization Expires 12-29-87 Approved By Per. 12-29-87

Must be filed with the K.C.C. five (5) days prior to commencing well
This card void if drilling not started within six (6) months of date received by K.C.C.

Important procedures to follow:

1. Notify District office before setting surface casing.

2. Set surface casing by circulating cement to the top.

3. File completion forms ACO-1 with K.C.C. within 90 days of well completion, following instructions on ACO-1, side 1, and including copies of wireline logs.

4. Notify District office 48 hours prior to old well workover or re-entry.

5. Prior to filing Intent, prepare a proposed plugging plan in case well is D & A, then obtain approval of plan when calling district office prior to setting surface pipe.

6. Submit plugging report (CP-4) to K.C.C. after plugging is completed.


7. Obtain an approved injection docket number before disposing of salt water.

8. Notify K.C.C. within 10 days when injection commences or terminates.

9. If an alternate 2 completion, cement in the production pipe from below any usable water to surface within 120 days of spud date.

A Regular Section of Land

1 Mile = 5,280 Ft.

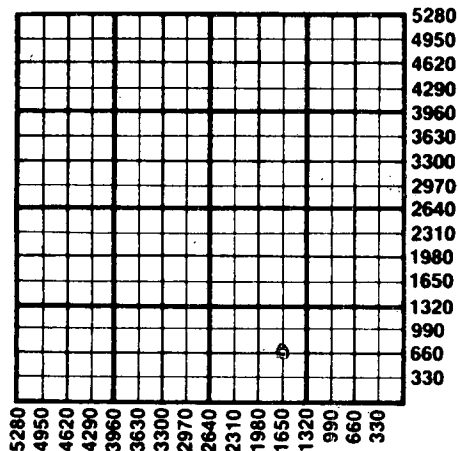

RECEIVED
STATE CORPORATION COMMISSION
JUN 29 1987
06-29-87
CONSERVATION DIVISION
WICHITA, KANSAS

State Corporation Commission of Kansas
Conservation Division
200 Colorado Derby Building
Wichita, Kansas 67202
(316) 263-3238