

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-093-20587-00-00
Spot: NW Sec/Twnshp/Rge: 15-21S-38W
3960 feet from S Section Line, 3960 feet from E Section Line
Lease Name: HARSHBARGER Well #: 1
County: KEARNY Total Vertical Depth: 3190 feet

Operator License No.: 3273
Op Name: LOEB, HERMAN L.
Address: PO BOX 524
LAWRENCEVILLE, IL 62439

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		1200		103.68
CIBP		2790		WITH 2 SX CMT
PROD	5.5	3184	0	WITH 200 SX CMT
SURF	8.625	417		WITH 325 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/02/2008 9:00 AM

Plug Co. License No.: 5112 Plug Co. Name: MIDWESTERN WELL SERVICE, INC.

Proposal Rcvd. from: LLYOD GATES Company: MIDWESTERN WELL SERVICE, IN Phone: (405) 834-7782

Proposed Plugging Method: CIBP @ 2790' & 2 SX CMT. PERFORATE AT 1200'. 80 SX CMT OVER CAPACITY 50 SX CMT DOWN 8 5/8"

Plugging Proposal Received By: RICHARD LACEY
Date/Time Plugging Completed: 06/02/2008 4:00 PM

WitnessType: COMPLETE (100%)
KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 2790' WITH 2 SX CMT. TEST CASING TO 500# & HELD. CIBP @ 1200'. PERFORATE AT 1150'. BREAKDOWN AT 1200# & ESTABLISH INJECTION RATE OF 2 BPM @ 700#. PUMP 80 SX CMT, 150# HULLS, AND 100 SX CMT DOWN 5 1/2" CASING. PRESSURE TO 800#. HELD AT 650#. NO BLOW OR CIRCULATION UP ANNULUS. PUMP 70 SX CMT DOWN ANNULUS AND PRESSURE TO 200# & HELD.

Perfs:

Top	Bot	Thru	Comments
2830	2886		

INVOICED

DATE 7-2-08

INV. NO. 2009060007

RECEIVED
KANSAS CORPORATION COMMISSION


JUN 09 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: CSG

District: 01

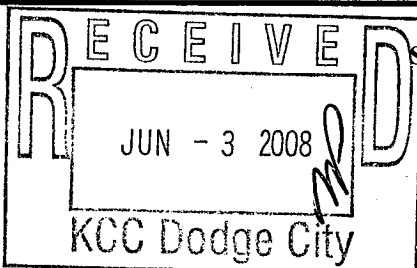

Signed

[Handwritten Signature]

(TECHNICIAN)