

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 15-193-20295-00-00

LEASE NAME Molesworth

WELL NUMBER 73-31

SPOT LOCATION NW SE NE

SEC. 31 TWP. 8S RGE. 36 ~~XX~~ or (W)

COUNTY Thomas

Date Well Completed \_\_\_\_\_

Plugging Commenced 8/21/85 <sup>KCC</sup>

Plugging Completed 8-22-85 <sup>ZAP</sup>

TYPE OR PRINT  
NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

LEASE OPERATOR First Energy Corporation

ADDRESS 16701 Greenspoint Park Dr., Suite 200  
Houston, Texas 77060

PHONE # (713) 875-5755 OPERATORS LICENSE NO. 7506

Character of Well D&A  
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? yes

Which KCC/KDHE Joint Office did you notify? \_\_\_\_\_

Is ACO-1 filed? yes If not, is well log attached? \_\_\_\_\_

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ bottom \_\_\_\_\_ T.D. \_\_\_\_\_

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
		surf	258'	8-5/8"	258'	none
		surf	825'	4-1/2"	825'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state, the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet each set. Well temporarily abandoned 12-5-85 w/125 sx plug placed at 1970' (Common w/6% gell & 3% CCl) 50 sx plug at 1054' (Sure fill). Tagged cement at 940'. (4-1/2" casing run and set @ 825' and cemented back to surface. Well permanently plugged on 8-22-85. Cut 8-5/8" & 4-1/2" casing off 3-1/2' below ground level. Displaced hole w/ one yard ready mix cement. Cementing to surface, covered casing w/ one yard cement and covered with dirt. Witnessed by Carl Goodrow, State representative.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor First Energy Corporatoin License No. 7506  
Address 16701 Greenspoint Park Dr., Suite 200, Houston, Texas 77060

STATE OF \_\_\_\_\_ COUNTY OF \_\_\_\_\_, ss.

Gayle Carter (employee of operator) or (operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well, and that the same are true and correct, so help me God.

DEC 23 1985

CONSERVATION DIVISION


SUBSCRIBED AND SWORN TO before me this 19 day of Dec, 1985

PAMELA R. AMBURN

Notary Public in and for the State of Texas

My Commission expires: My Commission Expires June 7, 1987

(Signature) Gayle Carter  
(Address) First Energy Corporation  
16701 Greenspoint Park Dr., 77060  
Houston, Texas 77060

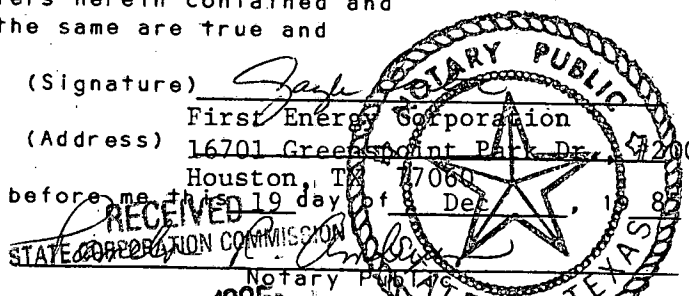

DEC 23 1985

CONSERVATION DIVISION  
Wichita, Kansas

Form CP-4

12-23-85