


DISTRICT CONSERVATION AGENT'S REPORT

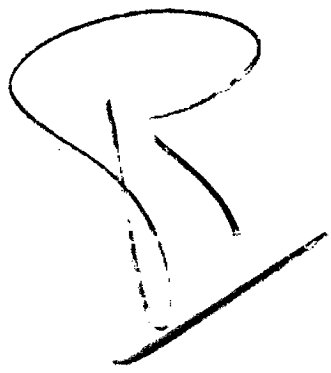

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION CS¹/₂ NW NW

SEC. 2 TWP. 9 RGE. 16 W

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. B-1 Lease Baxter B ^{KCC} _{ZAP}

Operator Broadview Oil Co Address Emporia, Kans

Field ~~Laton~~ Laton County Rooks

Total Depth 3238 Feet.

(Describe briefly the manner in which the well was plugged)

5 1/2" at 3152' with 50 sax cement behind.

Filled with mud and chat to 3120', set 4 sax cement with

dump bailer, pulled 1800', 5 1/2", filled hole with heavy

mud to 200', set rock bridge and 15 sax cement, filled with

heavy mud to 40', set rock bridge and 10 sax cement to

bottom cellar.

RECEIVED
OCT 13 1950

John P. Kelly
District Conservation Agent

Date 10-10-50

PLUGGING
FILE SEC 2 T 9 R 16W
BOOK PAGE 35 LINE 7