

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-21936-00-02
Spot: SWNWNW Sec/Twnshp/Rge: 23-29S-11W
990 feet from N Section Line, 330 feet from W Section Line
Lease Name: HISKETT B OWWO Well #: 3-23
County: PRATT Total Vertical Depth: 4532 feet

Operator License No.: 5056
Op Name: HOLL, F.G., COMPANY L.L.C.
Address: 9431 E CENTRAL STE 100
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4465	1700	WITH 75 SX CMT
SURF	8.625	281		WITH 200 SX CMT 147.29

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 05/15/2008 1:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: PUMP 100# HULLS & 25 SX CMT. PLUG AT 660' WITH 10 SX GEL & 50 SX CMT. PLUG AT 310' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 05/15/2008 2:15 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

PUMPED DOWN 5 1/2" CASING WITH 100# HULLS & 25 SX CMT. CMT TOP 1980'.
SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 660' WITH 10 SX GEL & 50 SX
CMT. 2ND PLUG AT 310' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
2332	2338		

INVOICED
DATE 7-1-08
INV. NO. 2009060001

Remarks: USED 60/40 POZMIX 4% GEL BY QULAIITY OILWELL CEMENTING.

Plugged through: CSG

District: 01

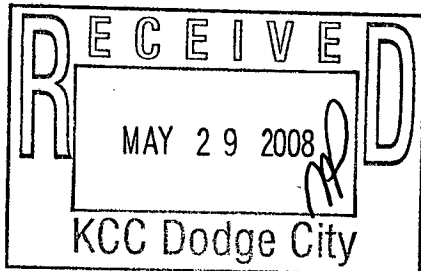

Signed

Stephen J. Pfeifer
(TECHNICIAN)

Form CP-23
[Handwritten initials]