

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-23070-00-00
Spot: N2N2NW Sec/Twnshp/Rge: 10-21S-11W
330 feet from N Section Line, 1250 feet from W Section Line
Lease Name: SLEEPER TRUST Well #: 1-10
County: STAFFORD Total Vertical Depth: 3460 feet

Operator License No.: 5056
Op Name: HOLL, F.G., COMPANY L.L.C.
Address: 9431 E CENTRAL STE 100
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3452	1650	WITH 325 SX CMT
SURF	8.625	266		WITH 225 SX CMT <u>112.45</u>

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 06/03/2008 2:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 3070' & 5 SX CMT. PLUG AT 600' WITH GEL & 50 SX CMT. PLUG AT 290' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY
Date/Time Plugging Completed: 06/03/2008 3:20 PM

Witness Type: COMPLETE (100%)
KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3070' & 5 SX CMT WITH DUMP BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 600' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 290' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3129	3359		


INVOICED
DATE 7-1-08
INV. NO. 2009060001

RECEIVED
KANSAS CORPORATION COMMISSION
JUN 09 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY OILWELL CEMENTING.

Plugged through: CSG

District: 01

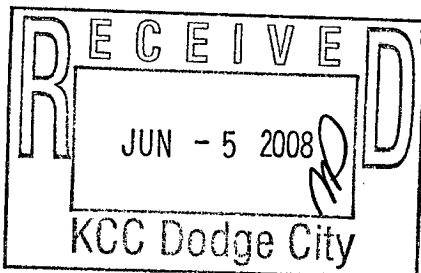

Signed

Richard W. Lacey
(TECHNICIAN)