

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-151-00010-00-01  
Spot: NWNWNE Sec/Twnshp/Rge: 35-29S-13W  
5060 feet from S Section Line, 2376 feet from E Section Line  
Lease Name: HUMBLE OWWO Well #: 2  
County: PRATT Total Vertical Depth: 4752 feet

Operator License No.: 31925  
Op Name: QUALITY WELL SERVICE, INC.  
Address: 190 US HWY 56  
ELLINWOOD, KS 67526

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4748	2250	WITH 225 SX CMT
SURF	8.625	356		WITH 325 SX CMT <b>154.44</b>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/23/2008 1:30 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: QUALITY WELL SERVICE Company: QUALITY WELL SERVICE, INC. Phone: (620) 727-3410

Proposed Plugging Method: SAND BACK TO 4290' & 5 SX CMT. PLUG AT 850' WITH GEL & 50 SX CMT. PLUG AT 380' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 05/23/2008 2:45 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SAND BACK TO 4290' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. 1ST PLUG AT 850' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 380' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

**INVOICED**  
DATE 7-3-08  
INV. NO. 2009060032

RECEIVED  
KANSAS CORPORATION COMMISSION


JUN 09 2008

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY OILWELL CEMENTING.

Plugged through: CSG

District: 01

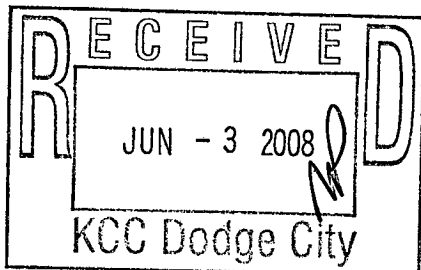

Signed

Steve Pfeifer  
(TECHNICIAN)

Form CP-2/3