

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-101-22097-00-00  
Spot: NWNESWNW Sec/Twnshp/Rge: 20-18S-27W  
1473 feet from N Section Line, 872 feet from W Section Line  
Lease Name: FENLEY "A" Well #: 1  
County: LANE Total Vertical Depth: 4650 feet

Operator License No.: 5046  
Op Name: RAYMOND OIL COMPANY, INC.  
Address: PO BOX 48788  
WICHITA, KS 67202

String Size Depth (ft) Pulled (ft) Comments  
SURF 8.625 249 WITH 175 SX CMT

151.13

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/31/2008 1:00 PM  
Plug Co. License No.: 6039 Plug Co. Name: L.D. DRILLING, INC.  
Proposal Rcvd. from: DAVID YOTT Company: L.D. DRILLING, INC. Phone: (620) 793-3051

Proposed Plugging Method: 1ST PLUG AT 2130' WITH 50 SX CMT. 2ND PLUG AT 1290' WITH 80 SX CMT. 3RD PLUG AT 630' WITH 50 SX CMT. 4TH PLUG AT 270' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Plugging Proposal Received By: JERRY W. STAPLETON Witness Type: NONE  
Date/Time Plugging Completed: 05/31/2008 4:30 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

1ST PLUG AT 2130' WITH 50 SX CMT. 2ND PLUG AT 1290' WITH 80 SX CMT. 3RD PLUG AT 630' WITH 50 SX CMT. 4TH PLUG AT 270' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Perfs:

INVOICED  
DATE 7-10-08  
INV. NO. 2009060062

RECEIVED  
KANSAS CORPORATION COMMISSION


JUN 26 2008

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

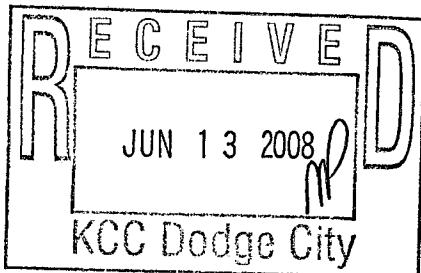

Signed

Jerry W. Stapleton  
PART II (TECHNICIAN)

Form CP-2/3

DP PRT