

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-083-21555-00-00
Spot: E2NENE Sec/Twnshp/Rge: 27-24S-23W
660 feet from N Section Line, 330 feet from E Section Line
Lease Name: BEIL 27A Well #: 1
County: HODGEMAN Total Vertical Depth: 4806 feet

Operator License No.: 4767
Op Name: RITCHIE EXPLORATION, INC.
Address: 8100 E 22ND ST N # 700 BOX 783188
WICHITA, KS 67278

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3950		WITH 2 SX CMT 156.20
CIBP		4617		WITH 2 SX CMT
PC		1415		CEMENTED WITH 300 SX CMT. 10 SX CMT TO PIT.
PROD 4.5		4799	0	CEMENTED WITH 200 SX CMT
SURF 8.625		209		

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 06/25/2008 11:20 AM
Plug Co. License No.: 32970 Plug Co. Name: H-D OILFIELD SERVICE, INC.
Proposal Rcvd. from: BENNIE DILLS Company: RITCHIE EXPLORATION Phone: (316) 691-9500

Proposed Plugging Method: CIBP @ 4617' WITH 2 SX CMT. CIBP @ 3950' WITH 2 SX CMT. CIRCULATE CMT FROM SURFACE FROM 1430'. FILL BACKSIDE.

Plugging Proposal Received By: JACK MACLASKEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/25/2008 12:35 PM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

SET CIBP @ 4617' WITH 2 SX CMT. SET CIBP @ 3950' WITH 2 SX CMT. RAN TBG IN TO 1460' & CIRCULATED CMT TO SURFACE WITH 150 SX CMT. BACKSIDE WAS FULL.

Perfs:

Top	Bot	Thru	Comments
4653	4658		
3998	4000		


INVOICED
DATE 7-15-08
INV. NO. 2009060090

RECEIVED
KANSAS CORPORATION COMMISSION

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

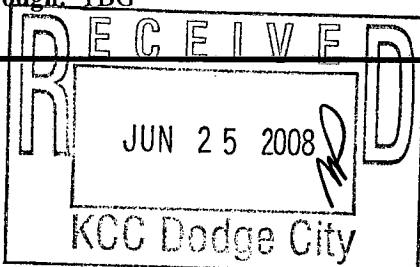

Signed Eric MacLaren
(TECHNICIAN)

JUN 30 2008
CONSERVATION DIVISION
WICHITA, KS