

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-21391-00-00
Spot: N2NW Sec/Twnshp/Rge: 35-32S-18W
4682 feet from S Section Line, 4055 feet from E Section Line
Lease Name: KIMBLE Well #: 35-2
County: COMANCHE Total Vertical Depth: 5250 feet

Operator License No.: 5047
Op Name: RUPE OIL COMPANY, INC.
Address: 111 WHITTIER # 1000 PO BOX 783010
WICHITA, KS 67207

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4700		WITH 2 SX CMT
COND	20	45		
PROD	5.5	5254	3516	WITH 250 SX CMT
SURF	8.625	673		WITH 255 SX CMT

Well Type: GAS UIC Docket No: Date/Time to Plug: 06/13/2008 10:05 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: ROGER UNRUH Company: RUPE OIL COMPANY Phone: (620) 546-4477

Proposed Plugging Method: CIBP @ 4700' WITH 2 SX CMT. PLUG AT 1100' WITH 50 SX CMT. PLUG AT 700' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: JACK MACLASKEY Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 06/16/2008 10:00 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

SET CIBP @ 4700' & 2 SX CMT. 1ST PLUG AT 1133' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 700' WITH 50 SX CMT. GAS BUBBLING UP OUTSIDE OF 8 5/8" CASING. LAID REST OF 5 1/2" DOWN AND SDF WEEKEND. 6/16/08: RAN TUBING IN & TAGGED CMT AT APP. 600'. PLUG AT 90' WITH 75 SX CMT. CIRCULATED & HELD.

Perfs:

Top	Bot	Thru	Comments
4746	4750		

INVOICED

DATE 7-15-08
INV. NO. 2009060093

RECEIVED
KANSAS CORPORATION COMMISSION


JUN 27 2008

Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND ACID & CMT.

CONSERVATION DIVISION
WICHITA, KS

Plugged through: CSG

District: 01

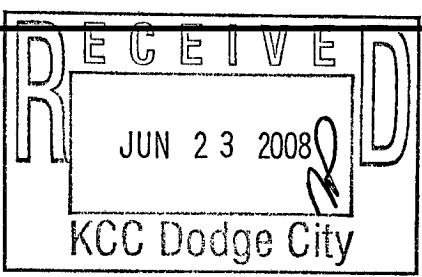

Signed Eric MacLaren
(TECHNICIAN)

Form CP-243
PKT