


15-163-01077-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD



Rooks _____ County. Sec. 21 Twp. 9S Rge. 19W (X) (X)

Location as "NE/CNW/SW" or footage from lines NE SW SE

Lease Owner Mayfield-Smith Drig., Inc. and Robinowitz Oil Co.

Lease Name Mongeau Well No. 1

Office Address 928 Union Center Bldg., Wichita 2, Kans.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 27, 1964 19

Application for plugging filed May 27, 1964 19

Application for plugging approved May 27, 1964 19

Plugging commenced May 27, 1964 19

Plugging completed May 27, 1964 19

Reason for abandonment of well or producing formation Oil in commercial quantities not found.

If a producing well is abandoned, date of last production - - - 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation - - - Depth to top - - Bottom - - Total Depth of Well 3650 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	201'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud to 540'. Set #1 plug with 20 Sacks of cement. Set #2 plug at 180' with 20 Sacks of Cement. Set #3 plug at 40' with 10 Sacks of Cement to base of cellar. Two sacks in rat hole.

RECEIVED
STATE CORPORATION COMMISSION

JUN 8 1964

CONSERVATION DIVISION
Wichita, Kansas


6-8-64

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Mayfield-Smith Drig., Inc.
Address 928 Union Center Bldg., Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Edgar E. Smith (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Edgar E. Smith
928 Union Center Bldg., Wichita 2, Kans. (Address)

SUBSCRIBED AND SWORN to before me this 2nd day of June, 19 64
Marguerite Mayfield Notary Public.
My commission expires 10-26-65

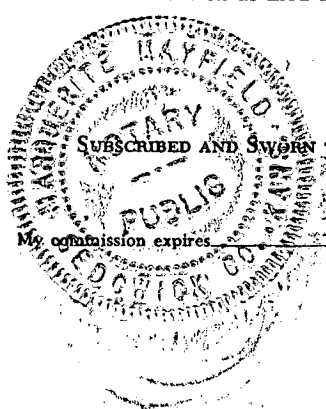

MAYFIELD-SMITH DRILLING, INC.

UNION CENTER BUILDING

WICHITA KANSAS

OFFICE AM 5-2223



15-163-01077-00-00

DRILLERS LOG

Re: Mayfield-Smith Drilling, Inc. - Robinowitz Oil Co.
#1 MONGEAU NE SW SE
Section 21-9S-19W, Rooks County, Kansas

Date Started: May 20, 1964

Date Completed: May 27, 1964

Casing: Set 201' 8 5/8" with 140 sacks Cement

			TOPS
0 - 200	Sand and Shale	Elevation:	2166' Kelly Bushing
200 - 740	Shale and Shell		
740 - 1000	Shale and Sand	Anhydrite	1541 + 625
1000 - 1015	Shale	Heebner	3318 - 1152
1015 - 1275	Sand	Toronto	3338 - 1172
1275 - 1541	Shale	Lansing	3358 - 1192
1541 - 1585	Anhydrite	Arbuckle	3600 - 1434
1585 - 1640	Shale and Red Bed	Total Depth	3650 - 1484
1640 - 2025	Shale		
2025 - 2755	Lime and Shale		
2755 - 3170	Shale and Lime		
3170 - 3268	Lime		
3268 - 3400	Lime and Shale		
3400 - 3554	Lime		
3554 - 3603	Lime and Shale		
3603 - 3650	Arbuckle		

RECEIVED
STATE CORPORATION COMMISSION

AFFIDAVIT

JUN 8 1964

6-8-64

CONSERVATION DIVISION
Wichita, Kansas

State of Kansas)
) SS
County of Sedgwick)

I, Edgar E. Smith, do hereby certify that the above and foregoing is a true and correct Log of the #1 Mongeau, located in the NE SW SE of Section 21, Township 9-South, Range 19-West, Rooks County, Kansas, as reflected by the Daily Drilling Reports of Mayfield-Smith Drilling, Inc.

Edgar E. Smith
Edgar E. Smith

State of Kansas)
) SS
County of Sedgwick)

Subscribed and sworn to before me this 2nd day of June, 1964, a Notary Public in and for Sedgwick County, Kansas.

Mary Karen Blume
Mary Karen Blume - Notary Public

My Commission Expires: June 14, 1964

