

15-163-00092-00-00

WELL PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

~~FORMATION PLUGGING RECORD~~

Strike out upper line
when reporting plug-
ging off formations.

NORTH



Locate well correctly on above
Section Plat

Rooks County. Sec 29 Twp 9 Rge 19 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW - SW - SW

Lease Owner Sunray Oil Corporation

Lease Name Des Marteau Well No. 1

Office Address Box 195, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed April 25, 1947 19

Application for plugging filed April 25, 1947 19

Application for plugging approved May 6, 1947 19

Plugging commenced April 25, 1947 19

Plugging completed April 25, 1947 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. D. Stough

Producing formation None Depth to top Bottom Total Depth of Well 3678 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10-3/4"	239	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set plug @ 240' and cemented w/ 15 sax. Filled w/ mud to 20'. Set plug and cemented to bottom of cellar w/ 10 sax.

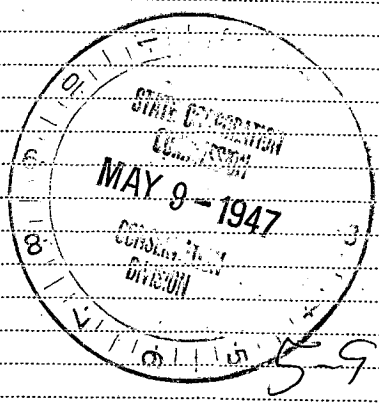

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Sunray Oil Corporation,
Address Box 195, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss. Louis T. Morratt

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed, and that the same are true and correct. So help me God.

(Signature) Louis T. Morratt
Box 195, Great Bend, Kansas
(Address)



Subscribed and sworn to before me this 8th day of May 1947.
Viola Beck
Notary Public.

PLUGGING
FILE SEC 29 T 9 R 19W
BOOK PAGE 108 LINE 34

15-163-00092-00-00

Sunray Oil Corporation
Philtower Building
Tulsa, Oklahoma

April 28, 1947

De Smarteau #1

SW cor. SW/4 SW/4
Sec. 29-98-19W
Rooks County, Kansas

Contractor: Stickle Drilling Co., Tulsa, Oklahoma

Started: April 14, 1947

Finished: April 25, 1947

LOG Elevation 2160

Cellar	0	4	
Sand & shale	4	70	
Shale & shells	70	650	1033/4" Csg. set @ 239'
Sand	650	750	Cemented w/ 175 sacks
Shale & shells	750	970	
Sand	970	1315	
Shale & shells	1315	1570	
Anhydrite	1570	1610	
Shale	1610	1640	
Red Sed & shells	1640	1855	
Shale	1855	1890	
Salt	1890	2100	
Shale & shells	2100	2170	
Lime & shale	2170	2360	
Lime	2360	2475	
Lime & shale	2475	2975	
Lime	2975	3558	
Lime & shale	3558	3603	
Lime	3603	3678	Total Depth Derrick Floor

Plugged with 15 sacks 10 ft. below surface pipe and 10 sacks at top of hole.

State of Kansas ()
County of Barton (ss)

I, Fred E. Stickle, do hereby certify that the above is a true and complete log of Sunray Oil Corporation's #1 De Smarteau located in the SW cor. SW/4 SW/4, Sec. 29-98-19W Rooks County, Kansas

Fred E. Stickle

Sworn to and subscribed before me this 28th day of April, 1947

PLUGGING

FILE SEC 29 T 9 R 19W
BOOK PAGE 108 LINE 34

Notary Public
MAY 1 1947



STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 800 BITTING BUILDING
 WICHITA, KANSAS

May 6, 1947

IN REPLY, PLEASE
 REFER TO THIS
 SUBJECT

15-163-00092-00-00

Sunray Oil Corporation
 Box 195
 Great Bend, Kansas

Gentlemen:

IN ACCOUNT WITH: Conservation Division, State Corporation Commission
 Wichita, Kansas

WE Charge YOU

Plugging Assessment.....\$ 25.00

Well No. 1
 Farm Desharreau
 Description SW SW 34 29-0-198
 County Rooks
 File: 109-34

The assessment for the plugging of all wells in the State of Kansas is one cent per foot, with a maximum of \$25.00 and a minimum of \$5.00.

This assessment will be past due May 20, 1947

PLEASE RETURN ONE COPY WITH REMITTANCE

NOTE: We also need a written Application, Well log and Well Plugging Record on this well to complete our files.

Paid 5/20/47
ew