


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rooks County, Sec. 16 Twp. 9S Rge. 18W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
NE NE NW
Lease Owner Zenith Drilling, Inc.
Lease Name KABA Well No. #1
Office Address Suite 505, Fourth Financial Center, Wichita, KS 67202
Character of Well (Completed as Oil, Gas or Dry Hole) _____



Dry Hole
Date Well completed December 24 1980
Application for plugging filed December 24 1980
Application for plugging approved December 24 1980
Plugging commenced December 24 1980
Plugging completed December 24 1980
Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered.
If a producing well is abandoned, date of last production 19


Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2842'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

T.D. 2842'
Set 1st Plug @ 720' with 70 sx.
Set 2nd Plug @ 240' with 25 sx.
Set 3rd Plug @ 40' Solid Bridge with 10 sx.
Rathole 5 sx., 50-50 posmix, 6% gel.
Plug was down @ 7:00 a.m., 12/24/80
State Plugger - Marion Schmidt

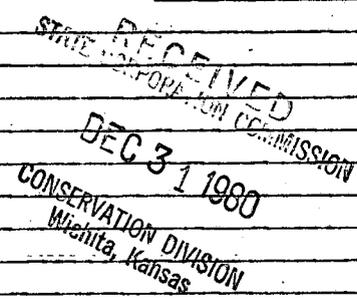

12-31-80

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Asst. Sec./Treasurer (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of December, 1980

Jeanette A. Metheny
Jeanette A. Metheny Notary Public

My commission expires 8-18-84



CONTRACTOR'S WELL LOG

15-163-2119S-00-00

OPERATOR:	Zenith Drilling Corporation
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	KABA #1
LOCATION:	NE NE NW, Section 16-9S-18W Rooks County, Kansas
SPUD DATE:	12/20/80
COMPLETION DATE:	12/24/80

0	1417	Sand & Shale
1417	1453	Anhydrite
1453	1995	Sand & Shale
1995	2842	Shale & Lime
	2842	Rotary Total Depth

Spud @ 12:45 p.m., 12/20/80. Drilled 247' in a 12 1/4" hole. Ran 6 jts. of 8 5/8" - 20# casing (tally 237.21) Set @ 243.71'. Cemented with 175 sx. of common 2% gel, 3% c.c. Plug was down @ 7:15 p.m., 12/20/80. Cement did circulate.

T.D. 2842' Set 1st Plug @ 720' with 70 sx., 2nd plug Set @ 240' with 25 sx., Set 3rd Plug @ 40' solid bridge with 10 sx.; Rathole 5 sx., 50-50 posmix, 6% gel. Plug was down @ 7:00 a.m., 12/24/80. State Plugger - Marion Schmidt.

SAMPLE TOPS:

Anhydrite 1417'
B/Anhydrite 1453'

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

RECEIVED
STATE CORPORATION COMMISSION
DEC 31 1980
CONSERVATION DIVISION
Wichita, Kansas
12-31-80

Jack L. Partridge, Assistant Secretary/Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the KABA #1, NE NE NW, Section 16-9S-18W, Rooks County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge
Jack L. Partridge, Asst. Sec./Treas.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 29th day of December, 1980.

Jeanette A. Metheny
Jeanette A. Metheny, Notary Public

