

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

Form ACO-1
September 1999
Form Must Be Typed

WELL COMPLETION FORM
WELL HISTORY - DESCRIPTION OF WELL & LEASE

ORIGINAL

CONFIDENTIAL

Operator: License # 0563
Name: BEREXCO, INC.
Address: P.O. BOX 20380
City/State/Zip: WICHITA, KS 67208
Purchaser: CENTRAL CRUDE
Operator Contact Person: EVAN C. MAYHEW
Phone: (316) 265-3311
Contractor: Name: MURFIN DRILLING CO. (RIG #22)
License: 30606
Wellsite Geologist: CURTIS COVEY

KCC
AUG 0 2 2005
CONFIDENTIAL

RECEIVED

AUG 0 4 2005

KCC WICHITA

Designate Type of Completion:
 New Well Re-Entry Workover
 Oil SWD SLOW Temp. Abd.
 Gas ENHR SIGW
 Dry Other (Core, WSW, Expl., Cathodic, etc)

If Workover/Re-entry: Old Well Info as follows:
Operator: _____
Well Name: _____

Original Comp. Date: _____ Original Total Depth: _____
 Deepening Re-perf. Conv. to Enhr./SWD
 Plug Back Plug Back Total Depth
 Commingled Docket No. _____
 Dual Completion Docket No. _____
 Other (SWD or Enhr.?) Docket No. _____

04/JUN/2005 13/JUN/2005 17/JUL/2005
Spud Date or Date Reached TD Completion Date or
Recompletion Date Recompletion Date

API No. 15 - 055-21874-00-00
County: FINNEY
SW SE SE Sec. 20 Twp. 22 S. R. 33 East West
330 feet from S N (circle one) Line of Section
990 feet from E W (circle one) Line of Section

Footages Calculated from Nearest Outside Section Corner:
(circle one) NE SE NW SW
Lease Name: ROSALIE Well #: 2-20
Field Name: DAMME
Producing Formation: MORROW

Elevation: Ground: 2900 Kelly Bushing: 2911
Total Depth: 4998 Plug Back Total Depth: 4946
Amount of Surface Pipe Set and Cemented at 1840 Feet
Multiple Stage Cementing Collar Used? Yes No
If yes, show depth set 3195 Feet
If Alternate II completion, cement circulated from _____
feet depth to _____ w/ _____ sx cmt.

Drilling Fluid Management Plan
(Data must be collected from the Reserve Pit) *ALT I water 8-2-07*
Chloride content 9000 ppm Fluid volume 2800 bbls
Dewatering method used EVAPORATION
Location of fluid disposal if hauled offsite: _____
Operator Name: _____
Lease Name: _____ License No.: _____
Quarter _____ Sec. _____ Twp. _____ S. R. _____ East West
County: _____ Docket No.: _____

INSTRUCTIONS: An original and two copies of this form shall be filed with the Kansas Corporation Commission, 130 S. Market - Room 2078, Wichita, Kansas 67202, within 120 days of the spud date, recompletion, workover or conversion of a well. Rule 82-3-130, 82-3-106 and 82-3-107 apply. Information of side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form (see rule 82-3-107 for confidentiality in excess of 12 months). One copy of all wireline logs and geologist well report shall be attached with this form. ALL CEMENTING TICKETS MUST BE ATTACHED. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature: Evan May
Title: DIVISION ENGINEER Date: 8/2/05
Subscribed and sworn to before me this 2nd day of August,
20 05
Notary Public: Diana E Plotner
Date Commission Expires: Aug 10, 2007

DIANA E PLOTNER
NOTARY PUBLIC
STATE OF KANSAS
My Appt. Exp. 8-10-07

KCC Office Use ONLY
YES Letter of Confidentiality Received
If Denied, Yes Date: _____
 Wireline Log Received
 Geologist Report Received
 UIC Distribution

CONFIDENTIAL

Side Two

ORIGINAL

Operator Name: BEREXCO, INC.

Lease Name: ROSALIE

Well #: 2-20

Sec. 20 Twp. 22 S. R. 33 East West

County: FINNEY

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all final copies of drill stems tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface test, along with final chart(s). Attach extra sheet if more space is needed. Attach copy of all Electric Wireline Logs surveyed. Attach final geological well site report.

KCC AUG 11 2 2005 CONFIDENTIAL

Drill Stem Tests Taken Yes No (Attach Additional Sheets)

Samples Sent to Geological Survey Yes No

Cores Taken Yes No

Electric Log Run Yes No (Submit Copy)

List All E. Logs Run:

SONIC, DUAL INDUCTION, NEUTRON/DENSITY, GAMMA RAY, MICROLOG

Log Formation (Top), Depth and Datum Sample

| Name | Top | Datum |
|-------------|------|-------|
| HEEBNER | 3812 | -901 |
| LANSING | 3860 | -949 |
| KANSAS CITY | 4202 | -1291 |
| MARMATON | 4362 | -1451 |
| MORROW | 4708 | -1797 |
| MISSISSIPPI | 4755 | -1844 |

CASING RECORD New Used

Report all strings set-conductor, surface, intermediate, production, etc.

| Purpose of String | Size Hole Drilled | Size Casing Set (In O.D.) | Weight Lbs. / Ft. | Setting Depth | Type of Cement | # Sacks Used | Type and Percent Additives |
|-------------------|-------------------|---------------------------|-------------------|---------------|----------------|--------------|----------------------------|
| SURFACE | 12-1/4 | 8-5/8 | 23 # | 1840 | LITE/COM | 600/150 | 3% CC, 1/4# FLOSEAL/3% CC |
| PRODUCTION | 7-7/8 | 5-1/2 | 14 # | 4994 | ASC | 175 | 5# GILS, 10% SALT, 2% GEL |
| | | | DV | 3195 | 60/40 POZ/COM | 250/50 | 8% GEL, 1/4# FLOSEAL/NONE |

ADDITIONAL CEMENTING / SQUEEZE RECORD

| Purpose: | Depth Top Bottom | Type of Cement | #Sacks Used | Type and Percent Additives |
|---|------------------|----------------|-------------|----------------------------|
| <input type="checkbox"/> Perforate | | | | |
| <input type="checkbox"/> Protect Casing | | | | |
| <input type="checkbox"/> Plug Back TD | | | | |
| <input type="checkbox"/> Plug Off Zone | | | | |

| Shots Per Foot | PERFORATION RECORD - Bridge Plugs Set/Type Specify Footage of Each Interval Perforated | Acid, Fracture, Shot, Cement Squeeze Record (Amount and Kind of Material Used) | Depth |
|----------------|--|--|---------|
| 1 SHOT/FT. | 4751-4754 | 750 GALS 7-1/2% HCL | 4751-54 |
| 1 SHOT/2 FT. | 4720-4728 | 1000 GALS 7-1/2% HCL | 4720-28 |
| | 4751-54, 4720-28 | 14000 GALS GELLED WATER, | 4720-54 |
| | | 17000 # 20/40 SAND | |

| | | | | |
|---------------|------------|-------------|----------------|---|
| TUBING RECORD | Size 2-3/8 | Set At 4686 | Packer At NONE | Liner Run <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |
|---------------|------------|-------------|----------------|---|

| | |
|--|--|
| Date of First, Resumerd Production, SWD or Enhr. 19/JUL/2005 | Producing Method <input type="checkbox"/> Flowing <input checked="" type="checkbox"/> Pumping <input type="checkbox"/> Gas Lift <input type="checkbox"/> Other (Explain) |
|--|--|

| | | | | | |
|-----------------------------------|---------------|-----------|-----------------|---------------|--------------|
| Estimated Production Per 24 Hours | Oil Bbls. 137 | Gas Mcf 0 | Water Bbls. 223 | Gas-Oil Ratio | Gravity 33.8 |
|-----------------------------------|---------------|-----------|-----------------|---------------|--------------|

Disposition of Gas METHOD OF COMPLETION Production Interval

Vented Sold Used on Lease Open Hole Perf. Dually Comp. Commingled Other (Specify) 4720-4754

(If vented, Submit ACO-18.)

CONFIDENTIAL

NLS WIRELINE CORP.
P.O. BOX 2146
LIBERAL, KS 67905
580-778-3338 FAX# 580-778-3271

KCC
AUG 0 2 2005
CONFIDENTIAL

ORIGINAL
JUN 17 2005

TEMPERATURE SURVEY

COMPANY: BEREXCO INC.
LEASE: ROSALIE
WELL NO.: #2
LOCATION: SEC.20-22-35
COUNTY, STATE: FINNEY CO., KS
DATE OF SURVEY: 6/15/2005

Well File

INSTR. NO.: 35594
CASING SIZE: 5 1/2"
SET @: 4994'
TD @: 4998'
HOLE SIZE: 7 7/8"
SACKS OF CEMENT: 2nd stage 300 sx
MIXTURE: 60-40 poss
ZERO POINT: GL

INSTR. TD. @ 3188' F/GL
TOP OF CEMENT @ 230'

RECEIVED
AUG 0 4 2005
KCC WICHITA

CONFIDENTIAL


TEMPERATURE SURVEY

COMPANY: BEREXCO INC.
LEASE: ROSALIE

WELL #: 2
LOCATION: FINNEY

ORIGINAL

KOC
AUG 02 2005
CONFIDENTIAL

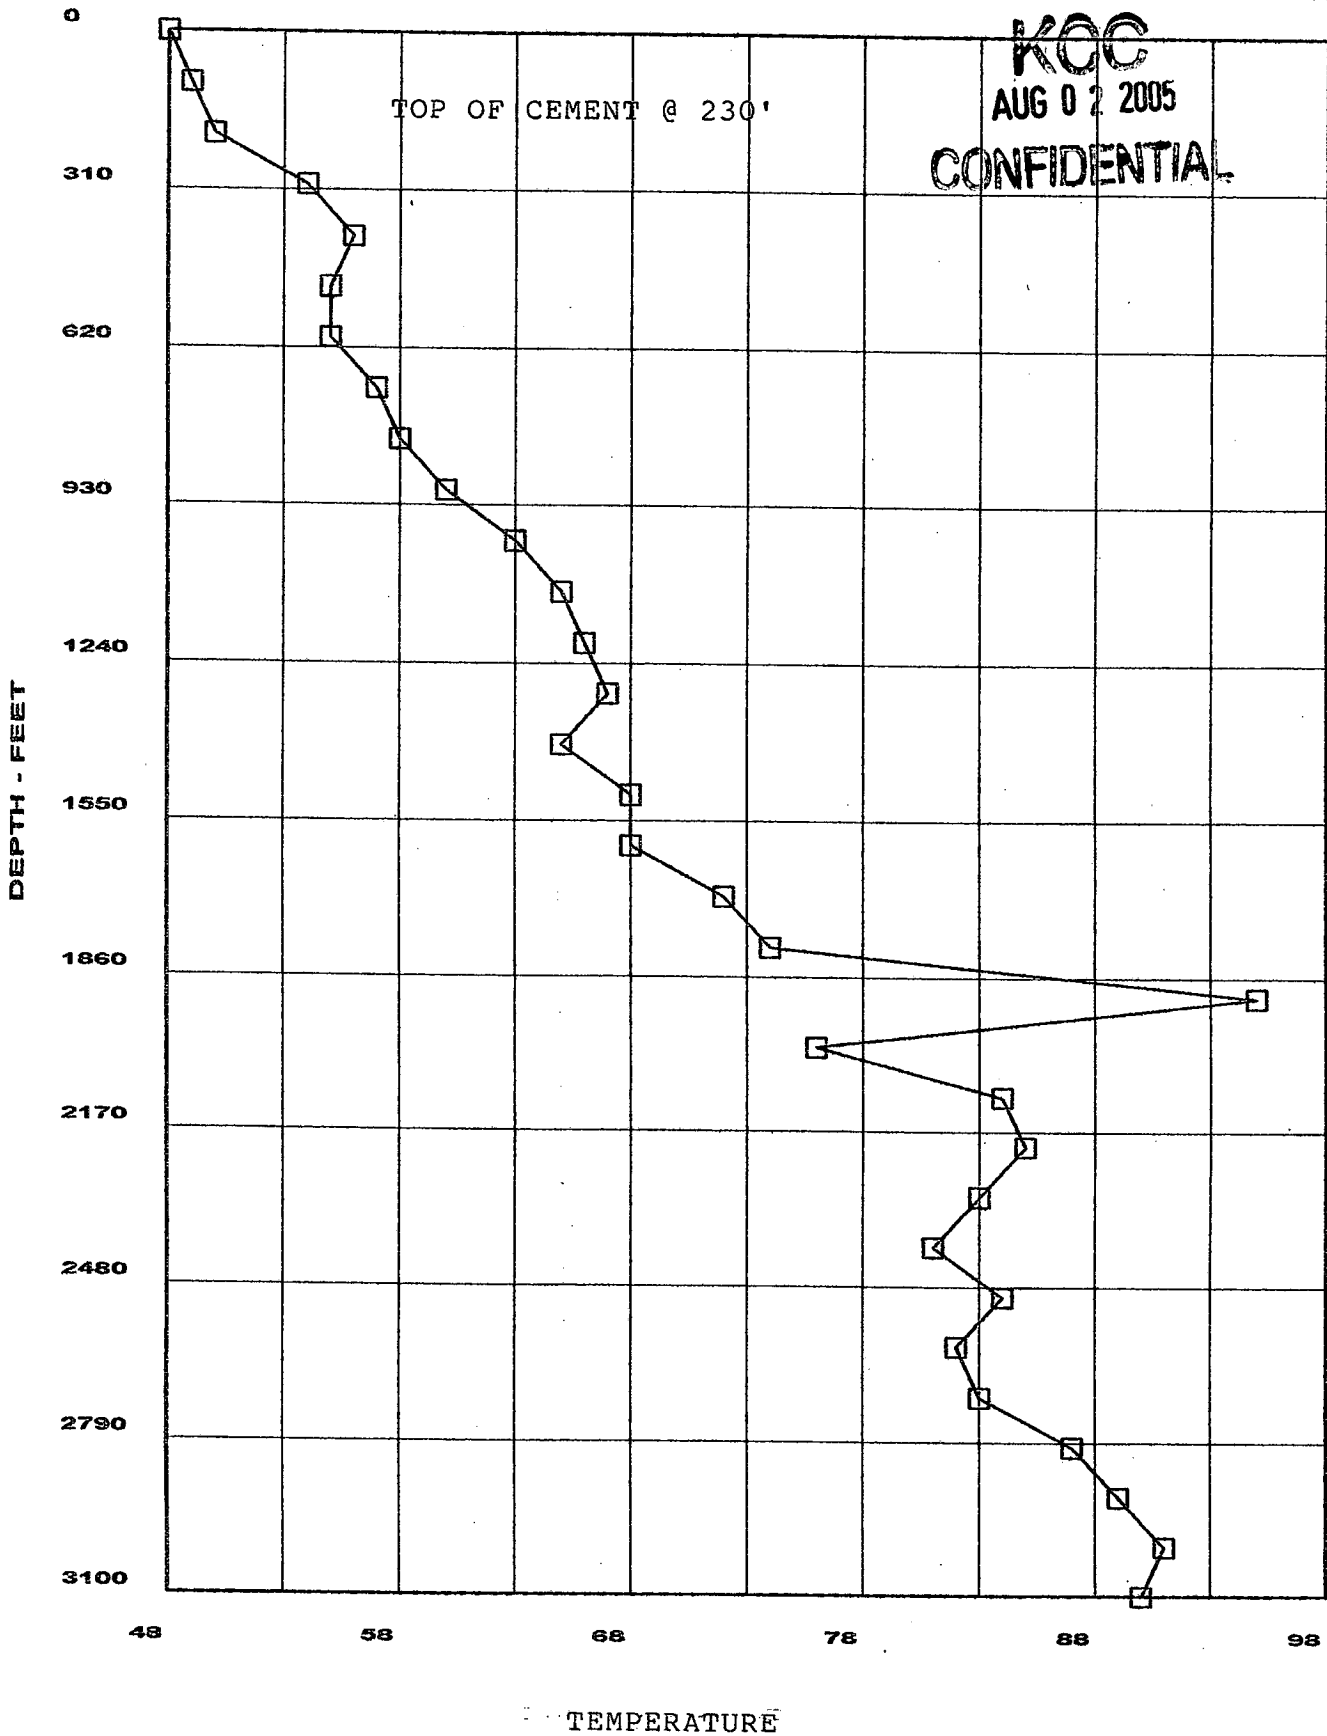

ALLIED CEMENTING CO., INC. 19297

CONFIDENTIAL

REMIT TO P.O. BOX 31
RUSSELL, KANSAS 67665

KCC
AUG 02 2005

ORIGINAL
SERVICE POINT:
oakley

| | | | | | | | |
|--|--------------------|--------------------------------------|------------------|------------|----------------------------|---------------------------|---------------------------|
| DATE <i>6-5-05</i> | SEC. <i>20</i> | TWP. <i>22S</i> | RANGE <i>33W</i> | CALLED OUT | ON LOCATION <i>5:20 PM</i> | JOB START <i>11:10 AM</i> | JOB FINISH <i>2:15 PM</i> |
| LEASE <i>Rosalie</i> | WELL # <i>2-20</i> | LOCATION <i>Tennis Rd + 83 4W 33</i> | | | COUNTY <i>Finney</i> | STATE <i>KS</i> | |
| OLD OR NEW (Circle one) <input checked="" type="radio"/> OLD <input type="radio"/> NEW | | | | | | | |

CONTRACTOR *Murfin Drig Rig 22*

TYPE OF JOB *Surface*

HOLE SIZE *12 1/4* T.D. *1842'*

CASING SIZE *8 5/8* DEPTH *1842.33'*

TUBING SIZE DEPTH

DRILL PIPE DEPTH

TOOL DEPTH

PRES. MAX MINIMUM

MEAS. LINE SHOE JOINT *45.36'*

CEMENT LEFT IN CSG. *45.36'*

PERFS.

DISPLACEMENT *114'*

EQUIPMENT

OWNER *Same*

CEMENT

AMOUNT ORDERED *150 sks com 3% CL*
600 sks Lite 3% CL 1/4" Plo Seal

| | | | |
|--------------------|-------------------|----------------|-----------------------|
| COMMON | <i>150 SKS</i> | @ <i>10.00</i> | <i>1500.00</i> |
| POZMIX | | @ | |
| GEL | | @ | |
| CHLORIDE | <i>24 SKS</i> | @ <i>38.00</i> | <i>912.00</i> |
| ASC | | @ | |
| <i>Lite weight</i> | <i>600 sks</i> | @ <i>9.30</i> | <i>5580.00</i> |
| | | @ | |
| <i>Plo Seal</i> | <i>150*</i> | @ <i>1.70</i> | <i>255.00</i> |
| | | @ | |
| | | @ | |
| | | @ | |
| | | @ | |
| | | @ | |
| HAND RECEIVED | <i>192 sks</i> | @ <i>6.60</i> | <i>1267.20</i> |
| MILEAGE | <i>64/sk/mile</i> | | <i>3326.40</i> |
| | | | TOTAL <i>12840.60</i> |

PUMP TRUCK CEMENTER *Dean*

373-781 HELPER *Andrew*

BULK TRUCK

347 DRIVER *Mike*

BULK TRUCK

386 DRIVER *Lonnie*

REMARKS:

Circulated 2 Bbls Cement TO Pit

Plug didn't land

Float Held.

Thank you

CHARGE TO: *Berexco Inc*

STREET _____

CITY _____ STATE _____ ZIP _____

KCC WICHITA SERVICE

| | | | |
|-------------------|-----------------|---------------|----------------------|
| DEPTH OF JOB | <i>1842'</i> | | |
| PUMP TRUCK CHARGE | | | <i>1320.00</i> |
| EXTRA FOOTAGE | | @ | |
| MILEAGE | <i>70 miles</i> | @ <i>5.00</i> | <i>350.00</i> |
| MANIFOLD | | @ | |
| | | @ | |
| | | @ | |
| | | | TOTAL <i>1670.00</i> |

8 5/8 PLUG & FLOAT EQUIPMENT

| | | |
|--------------------------|----------------|---------------|
| <i>Guide shoe</i> | @ | <i>235.00</i> |
| <i>API In sert</i> | @ | <i>325.00</i> |
| <i>3-Centralizers</i> | @ <i>55.00</i> | <i>165.00</i> |
| <i>1-Basket</i> | @ | <i>180.00</i> |
| <i>8 5/8 Rubber Plug</i> | @ | <i>100.00</i> |
| TOTAL <i>1005.00</i> | | |

To Allied Cementing Co., Inc.
You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as is listed. The above work was done to satisfaction and supervision of owner agent or contractor. I have read & understand the "TERMS AND CONDITIONS" listed on the reverse side.

TAX _____

TOTAL CHARGE ~~*1670.00*~~ _____

DISCOUNT ~~_____~~ IF PAID IN 30 DAYS

SIGNATURE *Kelly Wilson*

PRINTED NAME _____

CONFIDENTIAL **ALLIED CEMENTING CO., INC.** 19632
KCC ORIGINAL

REMIT TO P.O. BOX 31
 RUSSELL, KANSAS 67665

AUG 02 2005

SERVICE POINT:

Oakley

CONFIDENTIAL

| | | | | | | | |
|--------------------------------|--------------------|--|------------------|------------|----------------------------|--------------------------|----------------------------|
| DATE <u>6-14-05</u> | SEC. <u>20</u> | TWP. <u>22s</u> | RANGE <u>33w</u> | CALLED OUT | ON LOCATION <u>1:00 AM</u> | JOB START <u>9:30 AM</u> | JOB FINISH <u>12:15 AM</u> |
| LEASE <u>Rosalie</u> | WELL # <u>2-20</u> | LOCATION <u>Tennis Rd + 83 4W 3S W1S</u> | | | COUNTY <u>Finney</u> | STATE <u>Ks</u> | |
| OLD OR <u>NEW</u> (Circle one) | | | | | | | |

CONTRACTOR Murfin Drlg Rig 22
 TYPE OF JOB Two Stage (Bottom)
 HOLE SIZE 7 7/8 T.D. 4998'
 CASING SIZE 5 1/2 DEPTH 4999.95'
 TUBING SIZE DEPTH
 DRILL PIPE DEPTH
 TOOL DV-7001 DEPTH 3195.06'
 PRES. MAX 1100# MINIMUM 800#
 MEAS. LINE SHOE JOINT 40.80'
 CEMENT LEFT IN CSG. 40.80'
 PERFS.
 DISPLACEMENT 45 Bbls Water 76 Bbls Mud

| | | |
|--|----------------|----------------|
| OWNER <u>Squire</u> | | |
| CEMENT | | |
| AMOUNT ORDERED | | |
| <u>175 sks ASC 10% Salt 5# Gilsomite</u> | | |
| <u>2% Gel 500gals WFR-2</u> | | |
| COMMON | @ | |
| POZMIX | @ | |
| GEL <u>35kgs</u> | @ <u>14.00</u> | <u>42.00</u> |
| CHLORIDE | @ | |
| ASC <u>175 sks</u> | @ <u>11.65</u> | <u>2038.75</u> |
| <u>Gilsomite 875#</u> | @ <u>.60</u> | <u>525.00</u> |
| <u>WFR-2 500gals</u> | @ <u>1.00</u> | <u>500.00</u> |
| <u>Salt 16 sks</u> | @ <u>15.75</u> | <u>252.00</u> |
| | @ | |
| | @ | |
| | @ | |
| | @ | |
| | @ | |
| HANDLING <u>222 sks</u> | @ <u>1.60</u> | <u>355.20</u> |
| MILEAGE <u>64/sk/mile</u> | | <u>932.40</u> |
| TOTAL | | <u>4645.35</u> |

EQUIPMENT

PUMP TRUCK CEMENTER Dean
 # 373-281 HELPER Andrew
 BULK TRUCK
 # 347 DRIVER Lomnie
 BULK TRUCK
 # 218 DRIVER Alan

RECEIVED
 AUG 02 2005
 KCC WICHITA

REMARKS:

Pump 500gals WFR-2, 175 sks ASC
10% Salt 5# Gilsomite 2% Gel, Wash
Pump & Line, Disp 45 Bbls Water
76 Bbls Mud, Pump pressure 800#
Plug landed at 1100#.

Thank you

CHARGE TO: Berexco Inc
 STREET _____
 CITY _____ STATE _____ ZIP _____

SERVICE

| | | |
|------------------------------|---------------|----------------|
| DEPTH OF JOB <u>4988.95'</u> | | |
| PUMP TRUCK CHARGE | | <u>1435.00</u> |
| EXTRA FOOTAGE | @ | |
| MILEAGE <u>70 miles</u> | @ <u>5.00</u> | <u>350.00</u> |
| MANIFOLD | @ | |
| | @ | |
| | @ | |
| TOTAL | | <u>1785.00</u> |

PLUG & FLOAT EQUIPMENT

| | | |
|-----------------------------|-----------------|----------------|
| <u>Floater Shoe</u> | | <u>263.00</u> |
| <u>14 - Centralizers</u> | @ <u>50.00</u> | <u>700.00</u> |
| <u>3 - Baskets</u> | @ <u>140.00</u> | <u>420.00</u> |
| <u>1 - DV-Tool</u> | @ | <u>3300.00</u> |
| <u>Flex Latch Down Plug</u> | @ | <u>350.00</u> |
| <u>2 - Box Thread Lock</u> | @ | <u>60.00</u> |
| TOTAL | | <u>5093.00</u> |

To Allied Cementing Co., Inc.
 You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as is listed. The above work was done to satisfaction and supervision of owner agent or contractor. I have read & understand the "TERMS AND CONDITIONS" listed on the reverse side.

TAX _____
 TOTAL CHARGE ~~_____~~
 DISCOUNT ~~_____~~ IF PAID IN 30 DAYS

SIGNATURE [Signature]

GERSTNER
 PRINTED NAME

ALLIED CEMENTING CO., INC. 19633

CONFIDENTIAL

REMIT TO P.O. BOX 31
RUSSELL, KANSAS 67665

KCC

AUG 02 2005

ORIGINAL

SERVICE POINT:

CONFIDENTIAL

Oakley

| | | | | | | | |
|--|-------------------|--------------------|---------------------|---|-------------------------------|-----------------------------|------------------------------|
| DATE <i>6-14-05</i> | SEC. <i>20</i> | TWP. <i>22s</i> | RANGE <i>33w</i> | CALLED OUT | ON LOCATION <i>1:00 AM</i> | JOB START <i>3:00 PM</i> | JOB FINISH <i>4:00 PM</i> |
| LEASE <i>Rosalie</i> | | WELL # <i>2-20</i> | | LOCATION <i>Tennis Rd 483 4w 35 w/s</i> | | COUNTY <i>Finney</i> | STATE <i>KS</i> |
| OLD OR <input checked="" type="radio"/> NEW (Circle one) | | | | | | | |

| | |
|--------------------------------------|--|
| CONTRACTOR <i>Murfin Drlg Rig 22</i> | OWNER <i>same</i> |
| TYPE OF JOB <i>Two Stage (top)</i> | CEMENT |
| HOLE SIZE <i>7 1/8</i> | AMOUNT ORDERED <i>275 sks Lite 1/4" Pto Seal</i> |
| CASING SIZE <i>5 1/2</i> | <i>50 sks com</i> |
| TUBING SIZE | |
| DRILL PIPE | |
| TOOL <i>DV-tool</i> | |
| PRES. MAX <i>1800#</i> | |
| MEAS. LINE | |
| CEMENT LEFT IN CSG. | |
| PERFS. | |
| DISPLACEMENT <i>78 Bbls</i> | |

| |
|---------------------------------------|
| PUMP TRUCK CEMENTER <i>Dean</i> |
| # <i>373-281</i> HELPER <i>Andrew</i> |
| BULK TRUCK |
| # <i>347</i> DRIVER <i>Lornie</i> |
| BULK TRUCK |
| # <i>218</i> DRIVER <i>Alan</i> |

RECEIVED
 AUG 04 2005
 KCC WICHITA

| | | | | |
|-------------------|--------------------|---|--------------|---------------------------------------|
| COMMON | <i>50 sks</i> | @ | <i>10.00</i> | <i>500.00</i> |
| POZMIX | | @ | | |
| GEL | | @ | | |
| CHLORIDE | | @ | | |
| ASC | | @ | | |
| <i>Liteweight</i> | <i>275 sks</i> | @ | <i>8.80</i> | <i>2420.00</i> |
| <i>Pto Seal</i> | <i>69#</i> | @ | <i>1.70</i> | <i>117.30</i> |
| HANDLING | <i>325 sks</i> | @ | <i>1.60</i> | <i>520.00</i> |
| WEAAGE | <i>6# /sk/mile</i> | | | <i>1365.00</i> |
| TOTAL | | | | 4922.30 <i>14922.30</i> |

REMARKS:

Mix 15 sks in Rq7 Hole
Mix 10 sks in mouse hole
pump 250 sks Lite 1/4" Pto Seal,
50 sk com, Wash pump & Line,
Disc 78 Bbls water. Pump Pressure
1800#, DV Tool Closed at 1800#
Released & Dried up
Thank you

SERVICE

| | |
|-------------------------|---------------|
| DEPTH OF JOB | |
| PUMP TRUCK CHARGE | <i>785.00</i> |
| EXTRA FOOTAGE | @ |
| MILEAGE <i>70 miles</i> | @ <i>N/C</i> |
| MANIFOLD | @ |
| | @ |
| | @ |
| TOTAL <i>785.00</i> | |

CHARGE TO: *Berexco Inc.*

STREET _____

CITY _____ STATE _____ ZIP _____

PLUG & FLOAT EQUIPMENT

| | | |
|-------------|---|-------|
| _____ | @ | _____ |
| _____ | @ | _____ |
| _____ | @ | _____ |
| _____ | @ | _____ |
| _____ | @ | _____ |
| TOTAL _____ | | |

To Allied Cementing Co., Inc.
 You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as is listed. The above work was done to satisfaction and supervision of owner agent or contractor. I have read & understand the "TERMS AND CONDITIONS" listed on the reverse side.

| | |
|--------------------|------------------|
| TAX | _____ |
| TOTAL CHARGE | _____ |
| DISCOUNT | _____ |
| IF PAID IN 30 DAYS | |

SIGNATURE *Jay P. [Signature]*

GERSTNER

PRINTED NAME