


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Graham County. Sec. 18 Twp. 9S Rge. (E) 22 (W)  
Location as "NE/CNW/SW" or footage from lines NE NE SW  
Lease Owner Chief Drilling Co., Inc.  
Lease Name Ninemeyer Well No. 1  
Office Address Box 97 - Gt. Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 2/4 19 58  
Application for plugging filed 2/4 19 58  
Application for plugging approved 2/4 19 58  
Plugging commenced 2/4 19 58  
Plugging completed 2/4 19 58  
Reason for abandonment of well or producing formation Dry Hole

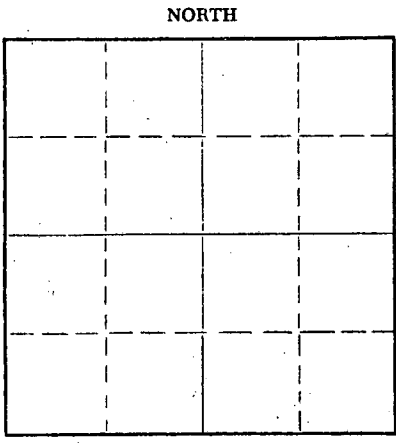

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well A.D. Fabricius - Hill City, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	240'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1/3 sack of hulls and wooden plug set @ 550', mixed 25 sacks cement through drill pipe - 1/3 sack of hulls and wooden plug set @ 215', mixed 15 sacks cement through drill pipe - 1/3 sack of hulls, wooden plug set @ 40', mixed 10 sacks cement through drill pipe.

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 5 1958  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Chief Drilling Co., Inc. 2-5-58  
Address Box 97 - Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.  
V. Richard Hoover, President (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) V. Richard Hoover  
Box 97 - Gt. Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of January 19 58  
Carmen Reinhardt Leiker  
Carmen Reinhardt Leiker Notary Public.

My commission expires Jan. 26, 1959.



PLUGGING  
FILE SEC 18 T 9 R 224  
BOOK PAGE 80 LINE 36

15-065-00931-00-00

WELL LOG

No. 1 Ninemeyer  
Chief Drilling Co., Inc.  
P.O. Box 97  
Great Bend, Kansas

Elevation: 2401 DF  
2399 GRD  
2404 KB

Commenced: 1/27/58  
Completed: 2/3/58

No. 1 Ninemeyer  
NE NE SW Sec. 18-9S-22W  
Graham County, Kansas

Contractor: Chief Drilling Co., Inc.  
Rotary: 0 - 3915' T.D.

Casing Record: Set 240' of 8 5/8" of 32# casing w/200 sacks Pozmix. Cement circulated.

Figures Indicate Bottoms of Formations

Clay, Sand, Shale & Shells	0 - 240
Shale	240 - 875
Shale & Sand	875 - 1000
Shale & Shells	1000 - 1590
Sand & Shale	1590 - 1720
Shale	1720 - 1948
Anhydrite	1948 - 1980
Lime & Shale	1980 - 3685
Lime	3685 - 3902
Shale	3902 - 3915' T.D.

Formation Tops & Minus

Anhydrite	1966 + 438
Heebner	3648 -1244
Toronto	3670 -1266
Lansing	3686 -1282
Base of K C	3902 -1498

State of Kansas )  
County of Barton )

I hereby certify that the above is a true and correct copy of Driller's Log of well drilled in the NE NE SW Sec. 18-9S-22W, Graham County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

*V. Richard Hoover*  
V. Richard Hoover, President

Subscribed to and sworn to before me this 4th day of February, 1958.

*Carmen Reinhardt Leiker*  
Carmen Reinhardt Leiker,  
Notary Public

My commission expires:  
Jan. 26, 1959.



RECEIVED  
FEB 5 1958

PLUGGING  
FILE SEC 18 T 9 R 22W  
BOOK PAGE 80 LINE 36

CONSERVATION DIVISION  
Wichita, Kansas