

R

DISTRICT CONSERVATION AGENT'S REPORT

15-065-00038-00-00

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 106-25

LOCATION NW-NW-NW

SEC. 27 TWP. 9 RGE. 21-W

Dry Hole X Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 1 Lease Miller


Operator Derby Oil Co Address Box #1030 - Wichita - Kansas

Field \_\_\_\_\_ County Graham

Total Depth 3843 Feet.

(Describe briefly the manner in which the well was plugged)

Surface plug set at 295 ft & cemented all around  
5 1/2" casing set at 3833 ft & cemented with 100 sacks of  
cement - 4 sacks of cement put in on bottom with  
Deerup Bailey - 5 1/2" casing shot off at 3175 ft & pulled  
filling hole with mud as pipe was pulled - Plug at  
280 ft with 15 sacks of cement on top - Surface Plug  
20 ft below surface with 8 sacks of cement on top -  
Mud between plugs -

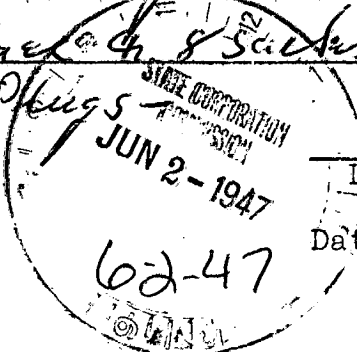

C. K. Stough  
District Conservation Agent  
Date 5-27-47

**PLUGGING**  
FILE SEC 27 T 9 R 21W  
BOOK PAGE 106 LINE 25