

15-065-00168-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

WELL PLUGGING RECORD

Graham County. Sec. 2 Twp. 9S Rge. 22 (E) W (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NE NE  
Lease Owner B & R Drilling, Inc.  
Lease Name Johnson Well No. # 1  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed May 13, 1950 19  
Application for plugging filed May 12, 1950 Verbally 19  
Application for plugging approved May 12, 1950 Verbally 19  
Plugging commenced May 13, 1950 19  
Plugging completed May 13, 1950 19  
Reason for abandonment of well or producing formation dry hole

NORTH

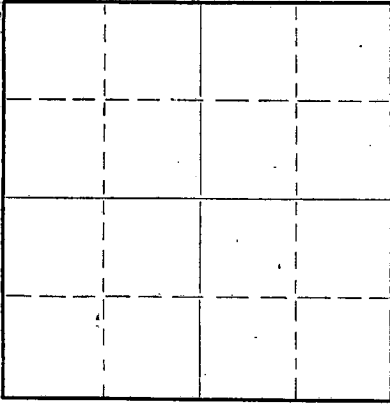

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well C. D. Stough  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3840' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	175'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugging Record

Fill hole with heavy mud to 170'. Wooden Plug @ 170'. 15 sacks of cement through drill pipe. Fill hole to 35'. Wooden plug @ 35'. 10 sacks of cement. Tie top plug to surface pipe. Mix cement in barrel.

5-19-50  
MAY 19 1950

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to B & R Drilling, Inc.  
Address Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.  
Don Roberts (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 18th day of May, 19 50  
My commission expires 6-17-50  
Clara Lumme Notary Public.



PLUGGING  
FILE SEC-2T-9-R  
PAGE 5

15-065-00168-00-00

B & R Drilling, Inc.  
Johnson # 1

NE NE NE Sec. 2-Twp. 9S Rge 22W  
Graham County, Kansas

Total Depth: 3840'  
Comm: 4-30-50  
Comp: 5-13-50

Casing

Cement

8 5/8" Set @ 175'

125 sacks of Lone Star

Formation	Depth:
Surface Clay-Shale-Sand	175
Shale-Shells	675
Sand-Shale-Shells	1080
Sand-Shale streaks	1200
Shale	1238
Sand	1402
Sand-Shale	1456
Shale-Lime	1505
Shale-Red Bed	1710
Anhydrite	1750
Shale-Shells	1820
Shale-Lime shells	2030
Shale-Lime	2345
Shale	2395
Lime-Shale	3245
Lime	3390
Lime-Shale	3435
Lime	3500
Lime-Chat	3544
Lime	3685
Lime-Shale	3760
Shale	3780
Shale-Shells	3788
Arbuckle	3795
Lime	3840

STATE OF KANSAS )  
                          )SS  
RUSSELL COUNTY )

I hereby certify that the above information is true and correct to the best of my knowledge.

Violet Keller

Subscribed and sworn to before me this 18th day of May, 1950

Clara Hummel  
Notary Public

My commission expires: 6-17-50

5-19-50

PLUGGING  
FILE SEC 2 T 9 R 22W  
WOCK PAGE 5 42