


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-065-00583-00-00
WELL PLUGGING RECORD

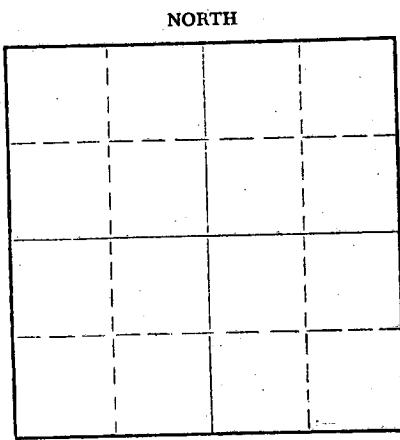

Locate well correctly on above
Section Plat

Graham County. Sec. 4 Twp. 9 Rge. 22 (E) (W)
Location as "NE/CNW/SW" or footage from lines NW/NW/NW
Lease Owner Woodman-Tannitti Drilling Co.
Lease Name Swank Well No. #1
Office Address Box 387, Hoisington, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed Yes 19____
Application for plugging approved Yes 19____
Plugging commenced _____ 12-17 1958
Plugging completed _____ 12-21 1958
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Fabricius
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3914' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3903	3,108'
				8 3/4"	181	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured into T.D. 3914'.
Plugging started 12-17-58. Finished 12-21-58.
Plugged off bottom, sanded to 3500' and dumped 3 sacks cement.
Worked pipe and shot at 3442'. Continued working pipe and shot pipe. Shot 5 1/2" casing at 3108'. Pulled pipe out of hole and plugged well as follows: Mudded to 160'. Set rock bridge and dumped 25 sacks cement. Filled hole with mud. Set rock bridge and mixed 10 sacks cement for cap on well. Well completed.

RECEIVED
STATE CORPORATION COMMISSION
DEC 30 1958
CONSERVATION DIVISION

12-30-58


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor J.O. Forbes d/b/a Forbes Casing Pulling Co.
Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J.O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.O. Forbes
(Address) Box 221, Great Bend, Kansas

SUBSCRIBED AND SWORN to before me this 22nd day of December, 1958

Betty S. Edman
Notary Public.



PLUGGING
FILE SEC 4 T 9 R 22W
BOOK PAGE 4 LINE 43

15-065-00585-00-00

D R I L L I N G L O G

Company: Woodman & Tannitti and E. J. Carter

Lease: #1 SWANK - NWc Sec 4-9-22W
Graham County, Kansas

Contractor: Woodman & Tannitti Drilling Company
P. O. Box 387, Hoisington, Kansas

Date Commenced: April 13, 1958

Date Completed: April 23, 1958

Total Depth: 3911'

Casing: 8 5/8" set at 181' with 125 sacks cement
5 1/2" set at 3903' with 75 sacks cement

Figures Indicate the Bottom of Formation

0-30	Clay	3155	Lime & Shale
35	Sand	3205	Lime
181	Shale	3320	Broken Lime
820	Shale	3810	Lime
1400	Shale - Sand	3864	Lime Chert
1650	Sand	3900	Chert
1870	Red Bed	3902	Lime
1890	Red Bed	3911	Dolomite
1924	Anhydrite		
2138	Shale & Shells & Lime		
2520	Lime & Shale		
2750	Lime		

GEOLOGICAL TOPS

Elevation	2311 RB
Anhydrite	1890 (driller) 421
Heebner	3518 -1207
Toronto	3539 -1228
Lansing	3552 -1241
Base/Kansas City	3777 -1466
Conglomerate	3847 -1536
Arbuckle	3902 -1591
Total Depth	3911 -1600

RECEIVED
STATE CORPORATION COMMISSION

DEC 30 1958

CONSERVATION DIVISION
Wichita

12-30-58

I certify the above to be a true and correct copy of the Driller's Log and geological tops to the best of my knowledge and belief.

WOODMAN & TANNITTI DRILLING CO.

By: X. T. Woodman

X. T. Woodman

PLUGGING
FILE SEC 4-9-22W
BOOK PAGE 4 LINE 43