

15-065-00037-00-00

R

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

W

FILE NO. _____

LOCATION NW-NW-SW

SEC. 33 TWP, 9 RGE. 22-W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Lloyd Loyd

Operator Anderson & Pritchard Address Ockerson Bldg - Wichita

Field _____ County Graham

Total Depth 3899 Feet.


(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/4 - 236 ft cemented all around
3/4 casing set at 3899 & cemented with 200 sacks cement
Plugged back to 3849 with cement. Prepared at 3795 ft tested
Put in Plug 9 - 5 sacks cement at 3583 ft - shot at 5 1/2 casing
at 1060 ft & pulled it out - Filled hole with heavy cement
to 236 ft & set Plug & 15 sacks cement at 236 ft - surface
Plug 20 ft below the surface & 10 sacks cement
Must be between Plugs -

Carl Miller - Pipe Puller & Plugger

C. M. Stovall
District Conservation Agent

Date 8-26-47

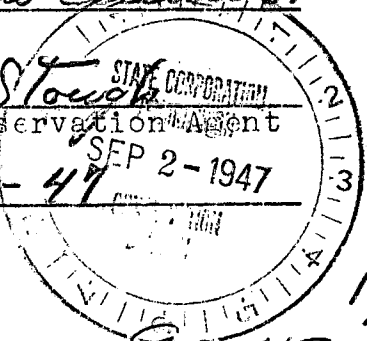

PLUGGING
FILE SEC 33 T 9 R 22W
BOOK PAGE 129 LINE 44

92-47 X