

STATE OF KANSAS
 STATE CORPORATION COMMISSION
 200 Colorado Derby Building
 Wichita, Kansas 67202

WELL PLUGGING RECORD
 K.A.R.-82-3-117

API NUMBER. 15-179-20,940-00-00

LEASE NAME Sheehan

TYPE OR PRINT
 NOTICE: Fill out completely
 and return to Cons. Div.
 office within 30 days.

WELL NUMBER 1

4290 Ft. from S Section Line

1320 Ft. from E Section Line

SEC. 3 TWP. 9S RGE. 26 (E 1/4) (W)

COUNTY Sheridan

Date Well Completed 3/16/89

Plugging Commenced 3/16/89

Plugging Completed 3/16/89

LEASE OPERATOR Ron's Oil Operations, Inc.

ADDRESS P. O. Box 194, Penokee, KS 67659

PHONE# (913) -674-2409 OPERATORS LICENSE NO. 6861

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC District Office prior to plugging this well? Yes

Which KCC Office did you notify? District #4

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom _____ T.D. 4060'

Show depth and thickness of all water, oil and gas formations.

RECEIVED
 STATE CORPORATION COMMISSION
03-20-1989
MAR 20 1989

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
				8-5/8"	242'	-0-

CONSERVATION DIVISION
 WICHITA, KANSAS

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Mud laden fluid 4060'-2260' 10 sks cement @ 40'
 25 sks cement @ 2260' 15 sks in rathole
 100 sks cement @ 1350' 10 sks in mousehole
 40 sks cement @ 290'

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, Kansas 67665-0506

STATE OF KANSAS COUNTY OF RUSSELL, ss.


Kyle B. Branum (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) [Signature]
 Kyle B. Branum
 (Address) P.O. Box 506, Russell, KS 67665-0506

SUBSCRIBED AND SWORN TO before me this 17th day of March, 19 89

[Signature]
 Glenda R. Tiffin, Notary Public

My Commission Expires: February 6, 1992



15-179-20940-00-00

EMPHASIS OIL OPERATIONS

P. O. BOX 506

RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: Ron's Oil Operations, Inc.
P. O. Box 194
Penokee, KS 67659

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Sheehan

WELL #1

LOCATION: S/2 N/2 NE
Section 3-9S-26W
Sheridan County, Kansas

LOGGERS TOTAL DEPTH: 4055'

ROTARY TOTAL DEPTH: 4060'

COMMENCED: 3/9/89

CASING: 8-5/8" @ 242' w/160 sks cement

ELEVATION: 2362'

COMPLETED: 3/16/89

STATUS: Dry Hole

RECEIVED
STATE CORPORATION COMMISSION

MAR 20 1989
03-20-1989
CONSERVATION DIVISION
Wichita, Kansas


DEPTHS & FORMATIONS

(All measurements from K.B.)

Top Soil, Sand & Clay	195'	Red Bed	2255'
Shale	624'	Anhydrite	2291'
Dakota Sand	691'	Red Bed	2600'
Red Bed	1867'	Shale & Lime Stks.	3750'
Cedar Hills Sand	2043'	Lime (R.T.D.)	4060'

STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)

Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.

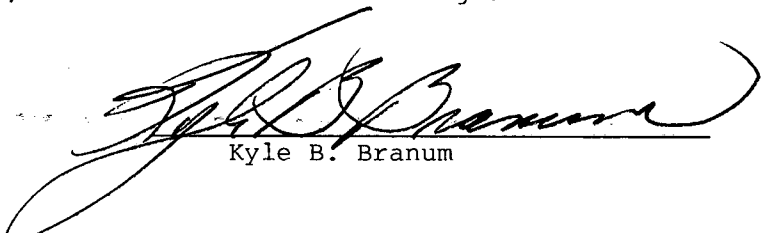


Kyle B. Branum

Subscribed and sworn to before me on March 17, 1989.

My commission expires: February 6, 1992.

GLEND A. R. TIFFIN
NOTARY PUBLIC
STATE OF KANSAS
MY APPT. EXPIRES 2-6-92



Glenda R. Tiffin, Notary Public