


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Graham County. Sec. 30 Twp. 9S Rge. 23 (E) W (W)
Location as "NE/CNW&SW&" or footage from lines C SE NW/4
Lease Owner BURCH EXPLORATION, Ltd.
Lease Name Gano Well No. 1
Office Address 1011 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 18, 1964
Application for plugging filed Verbally September 18, 1964
Application for plugging approved Verbally September 18, 1964
Plugging commenced September 18, 1964
Plugging completed 3:00 A.M. September 19, 1964
Reason for abandonment of well or producing formation Dry

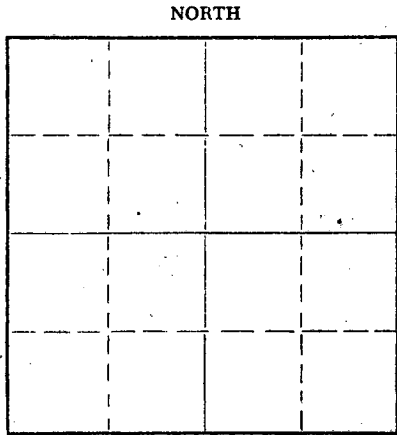

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes - verbally

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Moreland, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3475 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	200'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 200'
Set 1 plug at 550' w/ 20 sx cement through drill pipe
Set 2nd plug @ 190' w/ 1/4 sx hulls & 20 sx cement through drill pipe
Set 3rd plug @ 40' w/ 1/4 sx hulls & 10 sx cement

RECEIVED
STATE CORPORATION COMMISSION

SEP 24 1964

CONSERVATION DIVISION
Wichita, Kansas 9-24-64

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Abercrombie Drilling, Inc.,
Address 801 Union Center, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.
B. Lynn Herington (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) B. Lynn Herington

SUBSCRIBED AND SWORN TO before me this 22 day of Sept., 1964
Scholar L. Herington
Notary Public.



15-065-01061-00-00

CONTRACTOR'S WELL LOG

COMPANY: Burch Exploration, Ltd.
 CONTRACTOR: Abercrombie Drilling, Inc.
 FARM: GANO #1
 LOCATION: C SE NW Sec. 30-9S-23W
 Graham County, Kansas
 COMMENCED: September 4, 1964
 COMPLETED: September 20, 1964

0	105	Surface Clay and Sand
105	210	Shale
210	915	Shale and Sand
915	1435	Sand, Shale and Shells
1435	2101	Shale and Sand
2101	2137	Anhydrite
2137	2630	Shale and Lime
2630	2800	Shale
2800	2947	Lime and Shale
2947	3038	Lime
3038	3461	Lime and Shale
3461	3520	Lime
3520	3747	Lime and Shale
3747	4075	Lime
4075		Rotary Total Depth

Set 8 - 5/8" surface casing at 200'w/150 sx common cement, 2% gel.

DRY AND ABANDONED

RECEIVED
STATE CORPORATION COMMISSION

SEP 24 1964

ELEVATION: 2470 K. B.

ELECTRIC LOG TOPS:

Topeka	3586
Heebner	3803
Toronto	3826
Lansing	3842
Base K. C.	4065

CONSERVATION DIVISION
Wichita, Kansas

9-24-64

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, the undersigned, do hereby certify that the above and foregoing is a true and correct copy of the log of the GANO #1, C SE NW Section 30-9S-23W, Graham County, Kansas, as reflected by the files of Abercrombie Drilling, Inc.

B. Lynn Herrington
 B. Lynn Herrington

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 23rd day of September, 1964.

Scharla L. Herrington
 Scharla L. Herrington, Notary Public

My commission expires May 1, 1966.

