


15-065-19111-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Graham County. Sec. 3 Twp. 9 Rge. (E) 24 (W)
Location as "NE/CNW%SW%" or footage from lines SW NW SW
Lease Owner Empire Drilling Company
Lease Name Keith Well No. 3
Office Address 650 Fourth National Bank Building Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil --Depleted
Date well completed April 6, 1955 19
Application for plugging filed Sept. 11, 1958 19
Application for plugging approved Sept. 15, 1958 19
Plugging commenced Sept. 18, 1958 19
Plugging completed Sept. 22, 1958 19
Reason for abandonment of well or producing formation Depleted

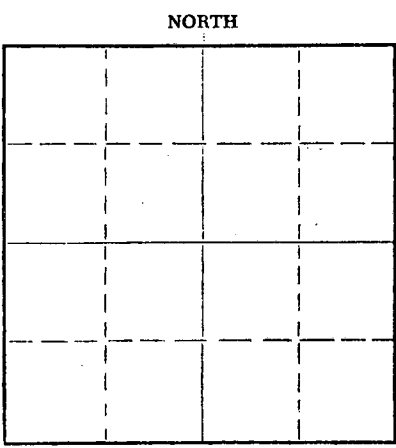

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius
Producing formation Lansing KC Depth to top _____ Bottom _____ Total Depth of Well 3950 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3951 feet to Surface feet for each plug set.

Well had been plugged back to 3936', and hole then filled with Sand to 3914 (Casing perforated at 3924); four sacks of cement placed in hole with dump bailer, casing shot and pulled, and hole filled with mud to 170 feet; ten foot rock bridge installed between 170 and 160 feet and 25 sacks of cement poured in hole; hole then filled with mud to 40 feet and hole capped with ten sacks ~~XXXXX~~ of cement.

Plugging complete

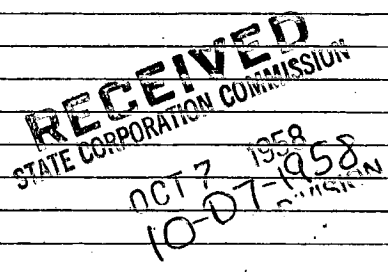


(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Barnes and Sons Pipe Pulling Company
Address Russell, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
I, Dan J. Kornfeld (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
650 Fourth National Bank Building
(Address)



SUBSCRIBED AND SWORN to before me this 6th day of October, 19 58
My commission expires October 21, 1958
Lucille Star Notary Public.

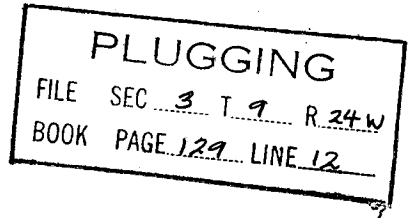

15-065-19111-00-00

LOG

COMPANY: EMPIRE DRILLING COMPANY
 CONTRACTOR: EMPIRE DRILLING COMPANY
 FARM: IDA KEITH #3
 LOCATION: SW NW SW SEC. 3-9-24
 GRAHAM COUNTY, KANSAS
 COMMENCED: 3-28-55
 COMPLETED: 4-6-55

0	TO	195	SHALE AND SAND
195	TO	640	SHALE
640	TO	1245	SHALE AND SAND
1245	TO	1925	SHALE AND SHELLS
1925	TO	2130	SHALE REDBED
2130	TO	2166	ANHYDRITE
2166	TO	2670	SHALE AND SHELLS
2670	TO	3080	LIME AND SHALE
3080	TO	3155	LIME
3155	TO	3570	SHALE AND LIME
3570	TO	3950	LIME
3950			R.T.D.

SET 189' OF 8 5/8" SURFACE CASING, CEMENTED WITH 115 SACKS OF CEMENT.

ELEVATION: 2439 K.B.

TOPS: ANHYDRITE 2130; HEEBNER 3733'; TORONTO 3757'; LANSING 3772'; R. T. D. 3950'.

D.S.T. #1 3912' TO 3932'; D.S.T. #2 3844 TO 3950'.

RAN 3941' OF 5 1/2" CASING. CEMENTED WITH 75 SACKS OF CEMENT.

C E R T I F I C A T I O N

I, DAN J. KORNFELD, DO HEREBY CERTIFY THAT THE ABOVE AND FOREGOING IS A TRUE AND CORRECT COPY OF THE LOG ON THE IDA KEITH #3, SW NW SW, SECTION 3, TOWNSHIP 9 SOUTH, RANGE 24 WEST, GRAHAM COUNTY, KANSAS, AS REFLECTED BY THE FILES OF THE EMPIRE DRILLING COMPANY.

DAN J. KORNFELD

SUBSCRIBED AND SWORN TO BEFORE ME A NOTARY PUBLIC WITHIN AND FOR SEDGWICK COUNTY, KANSAS THIS 13TH DAY OF APRIL, 1955.

MY COMMISSION EXPIRES DECEMBER 10, 1956

D. Walentine Jr.
NOTARY PUBLIC

RECEIVED
STATE CORPORATION COMMISSION
SEP 12 1958

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING			
FILE	SEC 3	T 9	R 24w
BOOK	PAGE 129	LINE 12	